

本产品手册资料由中油防爆印制，仅用于说明本系列产品的相关信息。中油随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，或对本手册印刷错误及不准确的信息进行必要的改进和更改，恕不另行通知。商家订货时请随时联系本公司，以证实有关信息。

This product manual is printed by CNPC explosion-proof, and is only used to describe the relevant information of this series of products. CNPC may improve the contents of this manual at any time due to technical upgrading or adoption of updated production process, or make mistakes in the printing of this manual. Accurate information is subject to improvement and change without prior notice. Please contact our company at any time to confirm the relevant information.

本画册采用生态纸印刷。珍惜资源，善待环境。

This album is printed on ecological paper. Cherish resources and be kind to the environment.



中油防爆电气(安徽)有限公司

ZHONG YOU EXPLOSION PROOF ELECTRICAL(ANHUI) CO.,LTD.

地址：安徽省蒙城县经济开发区纬八路2号

Address: Anhui Province Mengcheng County economic development Zone Weiba Road No. 2

http: //www.zhongyou-ex.com

Tel: 4008-606-956





Ex



洗眼器选型手册
Eyewash selection manual



中油防爆电气(安徽)有限公司
ZHONG YOU EXPLOSION PROOF ELECTRICAL(ANHUI) CO.,LTD.



公司概况 Company profile

中油防爆成立于2012年，总部座落在中国电气之都浙江温州乐清市柳市镇，总公司为浙江中油防爆电气有限公司，公司已有10多年防爆电气生产经验，产品应用于中石油、中海油、中石化、中化、中航油以及化工领域并赢得客户的认可。根据公司战略规化于2022年成立安徽生产基地，成立中油防爆电气(安徽)有限公司子公司，扩大了产品类和产能。

我公司是全球防爆电气能效一体化制造商，业务范围：研发、设计、生产、销售、服务、安装、检修、认证等，广泛应用于石油、化工、冶金、航天、煤矿、电力、铁路、船舶、消防、天然气、医药、军工等行业，我公司主要生产和销售固定式和移动式防爆照明灯具、防爆配电、防爆管件、防爆通讯、特殊非标防爆电器等产品。

我公司取得全国工业产品3C强制认证，是中国电器工业协会防爆分会的会员单位，通过了四大体系认证：质量管理体系ISO9001、环境管理体系ISO14001、职业健康安全管理体系18001，售后服务体系，获得了防爆电气设备安装、检修、维护资格证书，为了更好的服务国外市场，公司产品取得了欧盟ATEX CE和EAC认证。

公司以“智能防爆”为中心，研发了智能电伴热控制系统、智能安全帽控制系统、智能照明控制系统、智能疏散照明系统，相关产品满足在数字化工厂的需求和应用。

我们拥有高级研发技术团队，最完善的售前和售后服务队伍，公司生产的防爆产品取得了沈阳、天津、南阳和上海等颁发的证书。

产品的加工工艺和流程严格按照国际质量体系生产，外壳采用压铸铝合金一次性成型、表面处理采用钢珠抛丸和高压静电喷塑、机加工采用数控车床和微电脑自动钻攻设备，所有产品外露紧固件全为不锈钢螺丝。

质量是企业的生命，我们严格按照ISO9001-2208、EN13980质量管理体系的规定，制造有要求，检验有标准，过程有记录，责任可追溯，失误必纠正，隐患可预防，问题能有续改进。

Zhongyou Explosion-Proof was established in 2012, with its headquarters located in Liushi Town, Yueqing City, Wenzhou, Zhejiang Province-the "Capital of Electrical Equipment in China". Its parent company is Zhejiang Zhongyou Explosion-Proof Electrical Co., Ltd., with over 10 years of experience in manufacturing explosion-proof electrical equipment. The products have been applied in CNPC (China National Petroleum Corporation), CNOOC (China National Offshore Oil Corporation), Sinopec (China Petroleum & Chemical Corporation), Sinochem Group, China National Aviation Fuel Group, as well as the chemical industry, and have won recognition from customers. In line with the company's strategic planning, a production base was set up in Anhui in 2022, and a subsidiary-Zhongyou Explosion-Proof Electrical (Anhui) Co., Ltd. - was established to expand product categories and production capacity.

Our company is a global integrated manufacturer of explosion-proof electrical energy efficiency solutions. Our business scope covers R&D, design, production, sales, service, installation, maintenance and certification. The products are widely used in petroleum, chemical, metallurgy, aerospace, coal mining, electric power, railway, shipbuilding, fire protection, natural gas, pharmaceutical, military and other industries. We mainly produce and sell fixed and mobile Explosion-proof lighting fixtures, Explosion-proof power distribution equipment, Explosion-proof pipe fittings, Explosion-proof communication equipment, special non-standard Explosion-proof electrical appliances and other products.

The company has obtained the national 3C compulsory certification for industrial products and is a member unit of the Explosion Proof Branch of China Electrical Equipment Industrial Association. It has passed four major system certifications: ISO9001 Quality Management System, ISO14001 Environmental Management System, ISO45001 Occupational Health and Safety Management System, and After-sales Service System. It has also obtained the qualification certificate for installation, maintenance and repair of explosion-proof electrical equipment. To better serve the international market, the company's products have obtained EU ATEX CE certification and EAC certification.

Focusing on the concept of "Intelligent Explosion-Proof", the company has developed intelligent electric tracing heating control systems, intelligent safety helmet control systems, intelligent lighting control systems and intelligent emergency evacuation lighting systems. Relevant products meet the needs and application requirements of digital factories.

We have a senior R&D team and a comprehensive pre-sales and after-sales service team. The Explosion-proof products produced by the company have obtained certificates issued by authorities in Shenyang, Tianjin, Nanyang, Shanghai and other cities.

The processing technology and procedures of the products are strictly in accordance with international quality system standards. The shell is formed by one-time die-casting of aluminum alloy. The surface treatment adopts steel shot blasting and high-pressure electrostatic spraying. The machining process uses CNC lathes and microcomputer automatic drilling and tapping equipment. All exposed fasteners of the products are stainless steel screws.

Quality is the life of an enterprise. We strictly comply with the requirements of ISO9001:2015 and EN13980 quality management systems. We adhere to standardized manufacturing, standardized inspection, documented processes, traceable responsibilities, mandatory correction of errors, preventable hidden dangers and continuous improvement of problems.



CNPCEX 中油防爆电气(安徽)有限公司
ZHONG YOU EXPLOSION PROOF ELECTRICAL(ANHUI) CO.,LTD.

总目录 *General information*

A

洗眼器/冲淋器系列
Eyewash/Flusher Series

01-46

B

救援三脚架
Rescue tripod

47-48

C

安全柜
Safety cabinet

49-50

D

其他
Other

51-52

洗眼器/冲淋器系列 Eyewash/Flusher Series

化工企业的工作环境，时常会发生有毒有害物质喷溅到工作人员身体、脸、眼或发生火灾引起工作人员衣物着火，如何采用一种迅速将危害降到最低的洗消装置尤为重要。洗眼器就是在紧急情况下，暂时减缓有害物质对身体进一步侵害的洗消装置。早在80年代被美国、英国等绝大多数化工厂、实验室、医院、制药厂、食品厂、学校、科研、煤矿等广泛采用。其目的是用于减少遭受在工作中有毒有害物质对身体的伤害。


洗眼器是指当发生有毒有害物质(如化学液体、固体等)喷溅到工作人员身体、脸、眼或发生火灾引起工作人员衣物着火时，采用的一种迅速将危害降到最低的有效的安全洗消装置。

我司生产的洗眼器严格参照美国ANSI Z358.1-2009标准，并通过欧盟CE认证。产品种类齐全，主要有复合式冲淋洗眼器，立式洗眼器，防冻排空型洗眼器，电伴热型洗眼器，台式洗眼器，壁挂式洗眼器，便携式洗眼器等。

The working environment of chemical enterprise, often can produce poisonous and harmful substance spatter to staff body, face, eye or produce fire to cause staff clothing to catch fire. How to use a kind of quickly reduce harm to the lowest wash away device is particularly important. Eye washer is a device that temporarily slows down the further damage of harmful substances to the body in an emergency. As early as the 1980s, it was widely used by most chemical plants, laboratories, hospitals, pharmaceutical factories, food factories, schools, scientific research, mining and other media in the United States and Britain. Its purpose is to reduce the damage to the body caused by toxic and harmful substances at work.

Eye wash device is to point to when produce poisonous and harmful substance (such as chemical liquid, solid etc.) spray to staff body, face, eye or produce fire to cause staff clothing to catch fire, The utility model relates to an effective safety washing device which rapidly minimizes the harm.

Our eye washers strictly follow the American ANSI Z358.1-2009 standard and have passed the European Union CE certification. The product range is complete, mainly including compound washing eyewash, vertical eyewash, antifreeze emptying eyewash, electric heat tracing eyewash, desktop eyewash, wall-mounted eyewash, portable eyewash, etc.

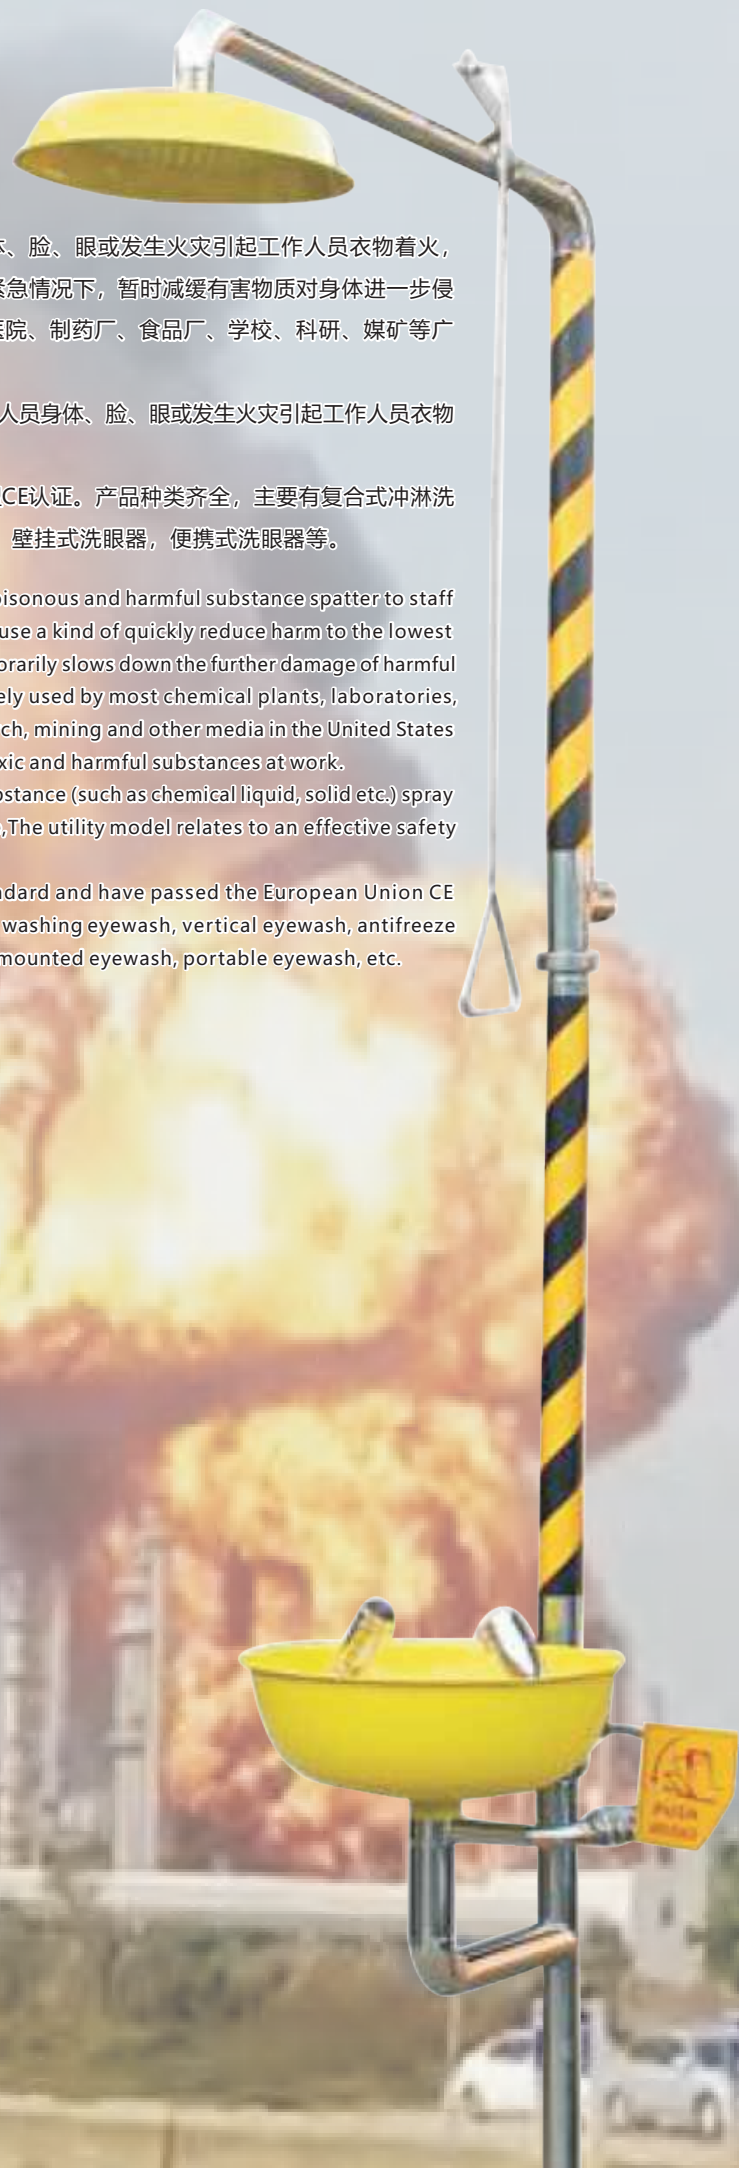




- ◆ 品名：不锈钢复合式洗眼器
- ◆ 型号：CN02101
- ◆ Product name: Stainless steel composite eyewash
- ◆ Model: CN02101

C 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为 1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进出水口—均为 1 1/4" 英制内螺纹。
- 5、水压—0.2MPa~0.8MPa。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

复合式洗眼器安装图
Compound eyewash installation diagram

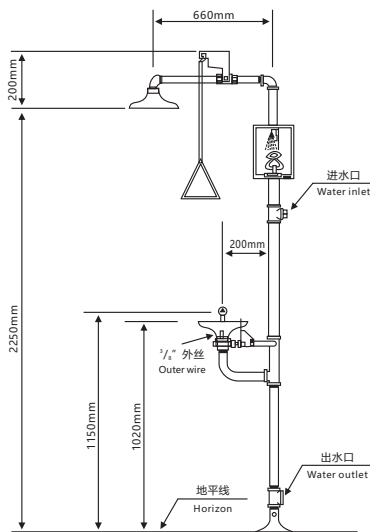

C Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet and outlet—both are 1 1/4" inch internal threads.
5. Water pressure—0.2MPa~0.8MPa.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ 可根据要求定制316不锈钢材质
- ★ Optional foot pedal device
- ★ 316 stainless steel material can be customized according to requirements



- ◆ 品名：复合式洗眼器
- ◆ 型号：CN02102
- ◆ Product name: Compound eyewash
- ◆ Model: CN02102

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—金属管材外加防腐涂层。
- 4、进出水口—均为1 1/4" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—metal pipes with anti-corrosion coating.
4. Water inlet and outlet—both are 1 1/4" inch internal threads.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢复合式洗眼器
- ◆ 型号：CN02103
- ◆ Product name: Stainless steel composite eyewash
- ◆ Model: CN02103

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀不锈钢材质。
- 4、进出水口—均为1" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punch valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant stainless steel.
4. Water inlet and outlet—both are 1" inch internal threads.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢复合式洗眼器
- ◆ 型号：CN02104
- ◆ Product name: Stainless steel composite eyewash
- ◆ Model: CN02104

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进出水口—均为 1 1/4" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品飞溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—The whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet and outlet—All are 1 1/4" inch internal threads.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：复合式洗眼器
- ◆ 型号：CN02105
- ◆ Product name: Compound eyewash
- ◆ Model: CN02105

G 技术参数：

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—金属管材外加防腐蚀涂层。
- 4、进出水口—均为1" 英制内螺纹。
- 5、水压—0.2MPA~0.6MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—metal pipes with anti-corrosion coating.
4. Water inlet and outlet—All are 1" inch internal thread.
5. Water pressure—0.2MPA~0.6MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢复合式脚踏护栏型洗眼器
- ◆ 型号：CN02106
- ◆ Product name: Stainless steel composite foot guardrail eyewash
- ◆ Model: CN02106

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进水口—为 $\frac{1}{4}$ " 英制内螺纹。
出水口—为1" 英制内螺纹。
- 5、护栏底托—有废水收集功能，脚踏自动控制洗眼开关，护栏有效防止受伤人员跌落。
- 6、水压—0.2MPA~0.8MPA。
- 7、水源—洁净的生活用水。
- 8、使用环境—油井平台作业，有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet— $\frac{1}{4}$ " inch internal thread.
Outlet — is 1" inch internal thread.
5. The bottom support of the guardrail—has waste water collection function, the foot pedal automatically controls the eyewash switch, and the guardrail effectively prevents injured persons fall.
6. Water pressure—0.2MPA~0.8MPA.
7. Water source—clean domestic water.
8. Use environment—Oil well platform operations, places where hazardous materials splash, polluted environments, a place where explosion or combustion may occur.



- ◆ 品名：复合式脚踏护栏型洗眼器
- ◆ 型号：CN02106A
- ◆ Product name: Compound foot guardrail eyewash
- ◆ Model: CN02106A

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—金属管材外加防腐蚀涂层。
- 4、进水口—为 $\frac{1}{4}$ " 英制内螺纹。
出水口—为1" 英制内螺纹。
- 5、护栏底托—有废水收集功能，脚踏自动控制洗眼开关，护栏有效防止受伤人员跌落。
- 6、水压—0.2MPA~0.8MPA。
- 7、水源—洁净的生活用水。
- 8、使用环境—油井平台作业，有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—metal pipes with anti-corrosion coating.
4. Water inlet—a $\frac{1}{4}$ " inch internal thread.
Outlet — is 1" inch internal thread.
5. The bottom support of the guardrail—has waste water collection function, the foot pedal automatically controls the eyewash switch, and the guardrail effectively prevents injured persons fall.
6. Water pressure—0.2MPA~0.8MPA.
7. Water source-clean domestic water.
8. Use environment—Oil well platform operations, places where hazardous materials splash, polluted environments, a place where explosion or combustion may occur.



- ◆ 品名：不锈钢复合式洗眼器
- ◆ 型号：CN02107
- ◆ Product name: Stainless steel composite eyewash
- ◆ Model: CN02107

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进出水口—均为 1/4" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet and outlet—both are 1/4" inch internal threads.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—Clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：浴帘型不锈钢复合式洗眼器(集水槽)
- ◆ 型号：CN02108
- ◆ Product name: Shower curtain type stainless steel composite eyewash(sink)
- ◆ Model: CN02108

G 技术参数:

- ◆ 浴帘型不锈钢复合式洗眼器是针对于冲淋器花洒时不能喷溅在地面上的环境而设计，专业的防水浴帘可有效地防止冲淋器花洒时喷溅四射，结合集水槽配套使用可有效将花洒喷溅废水收集起来，接通排水管道即可实现排水功能。
- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进水口—为1 1/4" 英制内螺纹。
出水口—为1" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ The shower curtain type stainless steel composite eyewash is aimed at the environment where the shower cannot be sprayed on the ground design, professional waterproof shower curtain can effectively prevent the shower from spraying when showering, combined with the sink it can effectively collect the spraying waste water from the shower, and the drainage function can be realized by connecting the drainage pipe.
- 1. Eyewash nozzle—It is made of stainless steel and equipped with a stainless steel filter screen, which can form a soft bubble water flow, which is more effective to quickly flush harmful substances in the eyes and reduce the damage to the eyes again.
- 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
- 3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
- 4. Water inlet—1 1/4" inch internal thread.
Outlet—is 1" inch internal thread.
- 5. Water pressure—0.2MPA~0.8MPA.
- 6. Water source—clean domestic water.
- 7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢立式洗眼器
- ◆ 型号：CN02201/CN02203
- ◆ Product name: Stainless steel vertical eyewash
- ◆ Model: CN02201/CN02203

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
出水口—为 $\frac{1}{4}$ " 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品飞溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet—it is $\frac{1}{2}$ " inch internal thread.
Water outlet—is $\frac{1}{4}$ " inch internal thread.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source-clean domestic water.
7. Use environment—places where hazardous materials splash,polluted Environments,a place where explosion or combustion may occur.


- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：立式洗眼器
- ◆ 型号：CN02202
- ◆ Product name: Vertical eyewash
- ◆ Model: CN02202

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—金属管材外加防腐涂层。
- 4、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
出水口—为 $\frac{1}{4}$ " 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

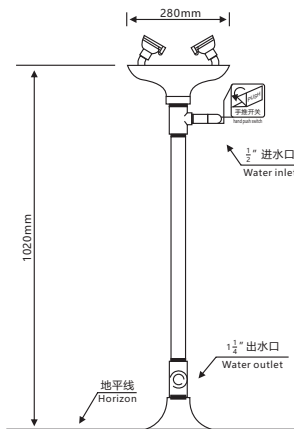

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—metal pipes with anti-corrosion coating.
4. Water inlet— $\frac{1}{2}$ " inch internal thread.
Water outlet—is $\frac{1}{4}$ " inch internal thread.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash,polluted Environments,a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢冲淋器/冲淋器
- ◆ 型号：CN02301/CN02302
- ◆ Product name: Stainless steel shower/shower
- ◆ Model: CN02301/CN02302

G 技术参数:

- 1、冲身喷头—为不锈钢材质，独特采用行业领先导流技术，使有效喷淋范围扩大20%。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
- 3、管材—CN02301通体为耐腐蚀304不锈钢。
管材—CN02302为金属管材外加防腐蚀涂层。
- 4、进水口—为1 1/4" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Punch nozzle—made of stainless steel, uniquely adopts industry-leading diversion technology to expand the effective spray range 20% bigger.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
3. Pipe material—CN02301 is made of corrosion-resistant 304 stainless steel.
Pipe material—CN02302 is a metal pipe with anti-corrosion coating.
4. Water inlet—1 1/4" inch internal thread.
5. Water pressure—0.2MPA~0.8MPA.
6. Use environment—places where hazardous materials splash, polluted environments, a place where explosion or combustion may occur.



- ◆ 品名：不锈钢冲淋器
- ◆ 型号：CN02303/CN02304
- ◆ Product name: Stainless steel shower
- ◆ Model: CN02303/CN02304

C 技术参数：

- 1、冲身喷头—为不锈钢材质，独特采用行业领先导流技术，使有效喷淋范围扩大20%。
- 2、阀门—冲身阀门为 1" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢。
- 4、进水口—为 1" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、使用环境—适用于室内狭窄空间，有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

C Technical Parameters:

1. Punch nozzle—made of stainless steel, uniquely adopts industry-leading diversion technology to expand the effective spray range 20% bigger.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
3. Pipe material—the whole body is corrosion-resistant 304 stainless steel.
4. Water inlet—1" inch internal thread.
5. Water pressure—0.2MPA~0.8MPA.
6. Use environment—applicable to indoor narrow spaces, places where hazardous materials splash, polluted environments, a place where explosion or combustion may occur.



- ◆ 品名：不锈钢手动排空防冻型洗眼器
- ◆ 型号：CN02501
- ◆ Product name: Stainless steel manual emptying antifreeze eyewash
- ◆ Model: CN02501

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为 1" 304不锈钢球阀。
冲眼阀门为 1/2" 304不锈钢球阀。
- 3、管材—通体为耐腐蚀304不锈钢材质。
- 4、进水口—为 1" 英制内螺纹。
出水口—为 1 1/4" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant 304 stainless steel.
4. Water inlet—1" inch internal thread.
Outlet — is 1 1/4" inch internal thread.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source—clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：经济型不锈钢手动排空防冻型洗眼器
- ◆ 型号：CN02502
- ◆ Product name: Economical stainless steel manual emptying antifreeze eyewash
- ◆ Model: Cn02502

G 技术参数：

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲身阀门为 1" 304 不锈钢球阀。
冲眼阀门为 1/2" 304 不锈钢球阀。
- 3、管材—通体为耐腐蚀不锈钢材质。
- 4、进出水口—均为 1" 英制内螺纹。
- 5、水压—0.2MPA~0.8MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。
- 8、使用提示—非工作状态下，装置内水能自动排空，无滞留防止冻管。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter net, can form a soft bubble water flow, more effectively flush the harmful substances in the eyes quickly, and at the same time reduce the damage to the eyes again.
2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
The punching valve is a 1/2" 304 stainless steel ball valve.
3. Pipe material—the whole body is made of corrosion-resistant stainless steel.
4. Water inlet and outlet—both are 1" inch internal threads.
5. Water pressure—0.2MPA~0.8MPA.
6. Water source-clean domestic water.
7. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.
8. Tips for use—Under non-working conditions, the water in the device can be automatically emptied, and there is no retention to prevent freezing of the pipe.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device



- ◆ 品名：不锈钢脚踏排空防冻型洗眼器
- ◆ 型号：CN02503
- ◆ Product name: Stainless steel foot-draining antifreeze eyewash
- ◆ Model: CN02503

G 技术参数：

- ◆ 不锈钢脚踏排空防冻型洗眼器适用于北方温度较低的危险工作区域，采用脚踏给水方式，用于洗眼和冲身使用，该装置处于非工作状态时，装置内的水会自动排空，以保证管道和阀门在寒冷地区不会冻裂，从而不影响正常使用。
- 1、阀门—冲眼阀门为 1/2" 304不锈钢球阀。
 - 2、管材—通体为耐腐蚀304不锈钢管材。
 - 3、进出水口—均为 1" 英制外螺纹。
 - 4、水压—0.2MPA~0.8MPA。
 - 5、水源—洁净的生活用水。
 - 6、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ Stainless steel foot-draining anti-freezing eyewash is suitable for dangerous working areas with low temperature in the north, adopting foot-pedals water supply method, used for washing eyes and flushing the body. When the device is in a non-working state, the water in the device will automatic emptying to ensure that the pipes and valves will not freeze and crack in cold areas, so as not to affect normal use.
1. Valve—The punching valve is a 1/2" 304 stainless steel ball valve.
 2. Pipe material—the whole body is corrosion-resistant 304 stainless steel pipe.
 3. Water inlet and outlet—both are 1" inch external threads.
 4. Water pressure—0.2MPA~0.8MPA.
 5. Water source—clean domestic water.
 6. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：不锈钢手动排空防冻型洗眼器
- ◆ 型号：CN02503A
- ◆ Product name: Stainless steel manual emptying antifreeze eyewash
- ◆ Model: CN02503A

C 技术参数:

- ◆ CN02503A不锈钢手动排空防冻型洗眼器适用于北方温度较低的危险工作区域，采用手动给水，用于洗眼和冲身使用。当使用完毕后，将给水控制杆拉回原位将停止供水，并且装置内的水会自动排空，以保证管道和阀门在寒冷地区不会冻裂，从而不影响正常使用。
- 1、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
 - 2、管材—通体为耐腐蚀304不锈钢管材。
 - 3、进出水口—均为 1" 英制外螺纹。
 - 4、水压—0.2MPa~0.8MPa。
 - 5、水源—洁净的生活用水。
 - 6、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

C Technical Parameters:

- ◆ CN02503A stainless steel manual emptying antifreeze eyewash is suitable for dangerous working areas with low temperature in the north. It adopts manual water supply for eye washing and body flushing. After use, pull the water supply lever back to its original position the water supply will be stopped, and the water in the device will be emptied automatically to ensure that the pipes and valves will not be freeze cracks, so it does not affect normal use.
1. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
 2. Pipe material—the whole body is corrosion-resistant 304 stainless steel pipe.
 3. Water inlet and outlet—both are 1" inch external threads.
 4. Water pressure—0.2MPa~0.8MPa.
 5. Water source—clean domestic water.
 6. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：不锈钢立式排空防冻型洗眼器
- ◆ 型号：CN02504
- ◆ Product name: Stainless steel vertical emptying antifreeze eyewash
- ◆ Model: CN02504

G 技术参数:

- ◆ 不锈钢立式排空防冻洗眼器是通过三相阀门开关起到排空防冻作用，本款装置适用于北方寒冷易结冰的危险工作区域，当打开手推开关时水进入管道，同时洗眼防尘盖打开进入洗眼状态。使用完成之后手推开关扳回原位，管道内的水自动排空。
- 1、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
 - 2、管材—通体为耐腐蚀304不锈钢管材。
 - 3、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
 - 4、出水口—为 $\frac{1}{4}$ " 英制内螺纹。
 - 5、水压—0.2MPA~0.8MPA。
 - 6、水源—洁净的生活用水。
 - 7、使用环境—危险品作业的场所。

G Technical Parameters:

- ◆ The stainless steel vertical emptying antifreeze eyewash is used for emptying and antifreezing through the three-phase valve switch. This device is suitable for dangerous working areas in the cold and easy to freeze in the north. When the hand push switch is turned on, water enters the pipeline and at the same time open the dust cover of the eye wash to enter the eye wash state. After use, push the switch back to the original position, the water in the pipe automatic emptying.
1. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
 2. Pipe material—the whole body is corrosion-resistant 304 stainless steel pipe.
 3. Water inlet— $\frac{1}{2}$ " inch internal thread.
 4. The water outlet—is $\frac{1}{4}$ " inch internal thread.
 5. Water pressure—0.2MPA~0.8MPA.
 6. Water source—clean domestic water.
 7. Use environment-the place where dangerous goods are operated.



- ◆ 品名：不锈钢壁挂排空防冻型洗眼器
- ◆ 型号：CN02505
- ◆ Product name: Stainless steel vertical emptying antifreeze eyewash
- ◆ Model: CN02505

G 技术参数：

- ◆ 壁挂排空防冻型洗眼器是通过三相阀门开关起到排空防冻作用，本款装置适用于北方寒冷易结冰的危险工作区域，当打开手推开关时水进入管道，同时洗眼防尘盖打开进入洗眼状态，使用完成之后手推开关扳回原位，管道内的水自动排空。

- 1、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 2、管材—通体为耐腐蚀304不锈钢管材。
- 3、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
- 4、出水口—为 $\frac{1}{4}$ " 英制外螺纹。
- 5、水压—0.2MPA~0.6MPA。
- 6、水源—洁净的生活用水。
- 7、使用环境—危险品作业的场所。

G Technical Parameters:

- ◆ The wall-mounted emptying and anti-freezing eyewash is used for emptying and anti-freezing through a three-phase valve switch. This device is suitable for in the cold and icy dangerous work area in the north, when the hand switch is turned on, water enters the pipe and washes the eyes at the same time open the dust cover and enter the eyewash state. After use, push the switch back to the original position, and the water in the pipe will automatically Empty.

1. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
2. Pipe material—the whole body is corrosion-resistant 304 stainless steel pipe.
3. Water inlet— $\frac{1}{2}$ " inch internal thread.
4. Water outlet—a $\frac{1}{4}$ " inch external thread.
5. Water pressure—0.2MPA~0.6MPA.
6. Water source—clean domestic water.
7. Use environment—the place where dangerous goods are operated.



- ◆ 品名：纯净级不锈钢复合式洗眼器
- ◆ 型号：CN02506
- ◆ Product name: Pure grade Stainless steel composite eyewash
- ◆ Model: CN02506

产品简介：

- ◆ 洗眼器主体采用优质卫生级304不锈钢材质，内壁也经过抛光处理，不会粘住水中的杂质，特别适合实验室，医疗和食品等行业使用。

Product Brief:


- ◆ The main body of the eyewash is made of high-quality sanitary 304 stainless steel, with polished inner wall, which won't stick to the impurities in the water. It is especially suitable for use in laboratories, medical and food industries.

工艺先进，光洁美观

- ◆ 304不锈钢材质，做工精细，美观大方。

Advanced technology, smooth and beautiful

- ◆ 304 stainless steel material, fine workmanship, beautiful and generous.

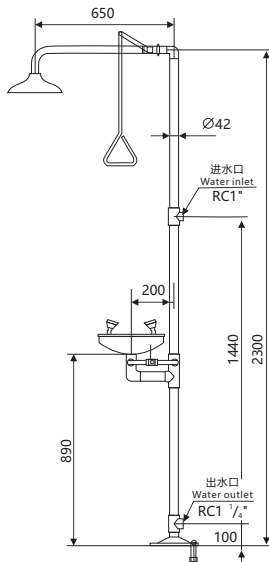

超大喷淋花洒
Enlarge the washbasin



加大洗脸盆
Enlarge the washbasin

- ◆ 冲淋网由大量圆孔排列组成水柱式喷洒清洗更彻底安全。
- ◆ The shower net is composed of a large number of round holes arranged in a water column spraying and cleaning more thoroughly and safely.
- ◆ 不锈钢过滤网喷头，使用更持久，出水柔和呈泡沫状。
- ◆ The sprinkler head with stainless steel filter screen is more durable, and the water is soft and foamy.

G 性能参数 Performance parameter

| 电气参数 Electrical parameters | |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 冲身喷头 Punching nozzle | 直径10" 不锈钢材质 10" Diameter stainless steel |
| 冲眼喷头 Punching nozzle | ABS工程塑料, 带有10" 不锈钢废水回收盆 ABS engineering plastic, with 10" stainless steel waste water recycling basin |
| 冲身阀门 Punch valve | 为1" 304不锈钢球阀 1"304 stainless steel ball valve |
| 冲眼阀门 Punch valve | 为1/2" 304不锈钢球阀 For 1/2" 304 stainless steel ball valve |
| 进 水 口 Water intake | 为1" 英制内螺纹 1" inch internal thread |
| 出 水 口 Outlet | 为1" 英制内螺纹 1" inch internal thread |
| 流 量 Flow rate | 根据管道压力不同, 其流量随之变化, 在规定的水压范围内, 冲眼流量为 ≥ 11.4 升/分钟, 冲身流量 ≥ 75.7 升/分钟 According to different pipeline pressures, the flow rate will change accordingly. Within the specified water pressure range, the punching flow rate is ≥ 11.4 liters/min, and the punching flow rate is ≥ 75.7 liters/min. |
| 水 压 Water pressure | 0.2MPA~0.6MPA |
| 水 源 Water source | 使用清洁的或经过滤后的水源 Use clean or filtered water |
| 使用环境 Use environment | 有危险物质喷溅的地方, 如化学品, 危险液体, 固定, 气体等有污染的环境 Places where hazardous substances are splashed, such as chemicals, hazardous liquids, fixed, gas and other polluted environments |
| 主要零部件材质 Material of main parts | 不锈钢304/可选 ABS 浸塑放光条需选配 Stainless steel mesh 304/optional ABS dipping |
| 特别提示 Special reminder | 1、如环境酸浓度过高, 建议选用316不锈钢材质 2、使用环境温度低于0°C时, 请选择使用防冻型洗眼器 3、可加装防烫装置, 避免管道内介质被阳光暴晒后温度过高, 造成使用者烫伤。标准防烫温度设定为35°C。 1. If the environmental acid concentration is too high, 316 stainless steel is recommended 2. When the operating environment temperature is lower than 0°C, please use an antifreeze eyewash. 3. An anti-scalding device can be installed to avoid the high temperature of the medium in the pipeline after being exposed to the sun, which may cause burns to the user. The standard anti-scalding temperature is set to 35°C. |

◆ 机器外形、技术参数性能及特点如有更改, 恕不另行通知, 未经本公司明确书面许可, 不得翻印或传播有关资料。

◆ The appearance, technical parameters, performance and characteristics of the machine are subject to change without notice. Reprinting or dissemination of relevant materials is not allowed without the express written permission of the company.



- ◆ 品名：防爆电伴热型复合式洗眼器
- ◆ 型号：CN02601
- ◆ Product name: Explosion-proof electric heat tracing composite eyewash
- ◆ Model: Cn02601


G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为1" 304不锈钢球阀。
 - 3、进出口—均为1" 英制外螺纹。
 - 4、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 5、水压—0.2MPa~0.8MPa。
 - 6、电压—220V-250V。
 - 7、接线箱防爆等级—Exed IIB T4。
 - 8、防护等级—IP54。
 - 9、水源—洁净的生活用水。
 - 10、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eye washer is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is made of PVC shell, inner tube is corrosion-resistant 304 stainless steel pipe, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Import and export—all 1" inch external thread.
 4. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output it is 114 liters/minute.
 5. Water pressure—0.2MPa~0.8MPa.
 6. Voltage—220V-250V.
 7. Explosion-proof grade of junction box—Exed IIB T4.
 8. Protection level—IP54.
 9. Water source—clean domestic water.
 10. Use environment—places where hazardous materials splash, polluted environments, a place where explosion or combustion may occur.

- ★ 可选配脚踏装置
- ★ Optional foot pedal device

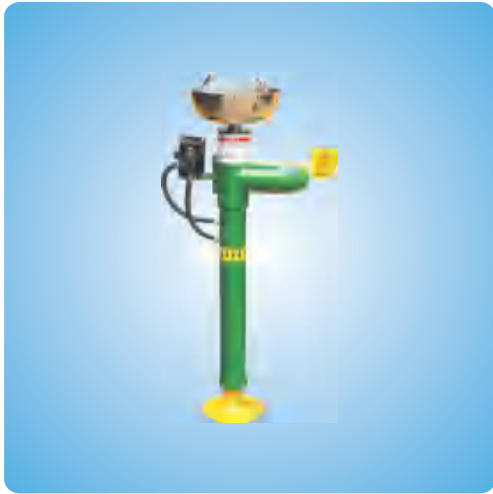

- ◆ 品名：防爆电伴热型立式洗眼器
- ◆ 型号：CN02602
- ◆ Product name: Explosion-proof electric heat tracing vertical eyewash
- ◆ Model: Cn02602

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲眼阀门为 1/2" 304不锈钢球阀。
 - 3、进水口—为 1/2" 英制外螺纹。
 - 4、出水口—为 1/4" 英制内螺纹。
 - 5、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 6、水压—0.2MPa~0.8MPa。
 - 7、电压—220V-250V。
 - 8、接线箱防爆等级—Exed IIB T4。
 - 9、防护等级—IP54。
 - 10、水源—洁净的生活用水。
 - 11、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eye washer is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is made of PVC shell, inner tube is corrosion-resistant 304 stainless steel pipe, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1/2" 304 stainless steel ball valve.
 3. Water inlet—1/2" inch external thread.
 4. The water outlet—is 1/4" inch internal thread.
 5. Flow rate—according to different pipeline pressures, the flow rate changes accordingly, within the specified water pressure range, the maximum water output is 114 liters/min.
 6. Water pressure—0.2MPa~0.8MPa.
 7. Voltage—220V-250V.
 8. Explosion-proof grade of junction box—Exed IIB T4.
 9. Protection level—IP54.
 10. Water source-clean domestic water.
 11. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型立式洗眼器
- ◆ 型号：CN02602A
- ◆ Product name: Explosion-proof electric heat tracing vertical eyewash
- ◆ Model: CN02602A

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲眼阀门为 1/2" 304不锈钢球阀。
 - 3、进水口—为 1/2" 英制外螺纹。
 - 4、出水口—为 1/4" 英制内螺纹。
 - 5、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 6、水压—0.2MPA~0.8MPA。
 - 7、电压—220V-250V。
 - 8、接线箱防爆等级—Exd IIC T6。
 - 9、防护等级—IP65。
 - 10、水源—洁净的生活用水。
 - 11、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eye washer is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is made of PVC shell, inner tube is corrosion-resistant 304 stainless steel pipe, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1/2" 304 stainless steel ball valve.
 3. Water inlet—1/2" inch external thread.
 4. The water outlet—is 1/4" inch internal thread.
 5. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output the volume is 114 liters/minute.
 6. Water pressure—0.2MPA~0.8MPA.
 7. Voltage—220V-250V.
 8. Explosion-proof grade of junction box—Exd IIC T6.
 9. Protection level—IP65.
 10. Water source—clean domestic water.
 11. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热自供水型立洗眼器(75L)
- ◆ 型号：CN02602B
- ◆ Productname:Explosion-proof electric heat tracing self-water supply type standing eyewash (75L)
- ◆ Model: CN02602B

G 技术参数:

- ◆ 此款为室外防冻自供水型洗眼器，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色，储水罐采用不锈钢加保温伴热材料制成，可有效增加储水温度，储水量为75L，也可根据客户要求定做。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
 - 3、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
 - 4、出水口—为 $\frac{1}{4}$ " 英制内螺纹。
 - 5、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 6、水压—0.2MPA~0.8MPA。
 - 7、电压—220V-250V。
 - 8、接线箱防爆等级—Exed IIB T4。
 - 9、防护等级—IP54。
 - 10、水源—洁净的生活用水。
 - 11、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This is an outdoor antifreeze self-water supply eyewash, which can be used normally within the range of -20℃~-40℃. The whole body is PVC shell, the inner tube is corrosion-resistant 304 stainless steel pipe, wound by a high-performance heating electric heating cable, The thermal insulation layer is composed of polyurethane, and the whole is environmentally friendly green or yellow. The water storage tank is made of stainless steel with thermal insulation and heat tracing. Made of material, it can effectively increase the water storage temperature, the water storage capacity is 75L, and it can also be customized according to customer requirements.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
 3. Water inlet— $\frac{1}{2}$ " inch internal thread.
 4. Water outlet— $\frac{1}{4}$ " inch internal thread.
 5. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output It is 114 liters/minute.
 6. Water pressure—0.2MPA~0.8MPA.
 7. Voltage—220V-250V.
 8. Explosion-proof grade of junction box—Exed IIB T4.
 9. Protection level—IP54.
 10. Water source—clean domestic water.
 11. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(废水回收型)
- ◆ 型号：CN02603
- ◆ Product name: Explosion-proof electric heat tracing composite eyewash(wastewater recovery type)
- ◆ Model: CN02603

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为1" 304不锈钢球阀。
 - 3、进出口—均为1" 英制外螺纹。
 - 4、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 5、水压—0.2MPA~0.8MPA。
 - 6、电压—220V-250V。
 - 7、接线箱防爆等级—Exed IIB T4。
 - 8、防护等级—IP54。
 - 9、水源—洁净的生活用水。
 - 10、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eyewasher is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is made of PVC. The shell and inner tube are corrosion-resistant 304 stainless steel pipes, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Import and export—all 1" inch external thread.
 4. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output the volume is 114 liters/minute.
 5. Water pressure—0.2MPA~0.8MPA.
 6. Voltage—220V-250V.
 7. Explosion-proof grade of junction box—Exed IIB T4.
 8. Protection level—IP54.
 9. Water source—clean domestic water.
 10. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(防尘型)
- ◆ 型号：CN02603A
- ◆ Product name: Explosion-proof electric heating type composite eyewash(dust-proof type)
- ◆ Model: CN02603A

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成。独特的洗眼盆防尘盖设计，专业适用于户外风沙地区。当打开防尘盖时，洗眼喷头自动喷水，合上盖子则自动关闭阀门，使用方便。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为1" 304不锈钢球阀。
 - 3、进出口—均为1" 英制外螺纹。
 - 4、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 5、水压—0.2MPA~0.8MPA。
 - 6、电压—220V- 250V。
 - 7、接线箱防爆等级—Exed IIB T4。
 - 8、防护等级—IP54。
 - 9、水源—洁净的生活用水。
 - 10、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eye washer is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is PVC shell. Inner tube are corrosion-resistant 304 stainless steel pipes, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane. The unique dust-proof cover design of the eyewash basin is professionally suitable for outdoor sandy areas. When open when the dust cover is on, the eyewash nozzle automatically sprays water, and the valve is automatically closed when the cover is closed, which is convenient to use.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Import and export—all 1" inch external thread.
 4. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output the volume is 114 liters/minute.
 5. Water pressure—0.2MPA~0.8MPA.
 6. Voltage—220V- 250V.
 7. Explosion-proof grade of junction box—Exed IIB T4.
 8. Protection level—IP54.
 9. Water source—clean domestic water.
 10. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(可拆卸型)
- ◆ 型号：CN02603B
- ◆ Product name: Explosion-proof electric heating type composite eyewash(removable type)
- ◆ Model: CN02603B

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为金属外壳，静电喷涂防腐涂层，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色，可分解拆卸维修。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为1" 304不锈钢球阀。
 - 3、进水口—为1" 英制外螺纹。
 - 4、出水口—为 1/4" 英制外螺纹。
 - 5、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 6、水压—0.2MPA~0.8MPA。
 - 7、电压—220V-250V。
 - 8、接线箱防爆等级—Exed IIB T4。
 - 9、防护等级—IP54。
 - 10、水源—洁净的生活用水。
 - 11、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eyewash is an outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃, and the whole body is made of metal shell, electrostatic spraying anti-corrosion coating, the inner tube is corrosion-resistant 304 stainless steel pipe, made of high-performance heating the heating tape is wound, and the thermal insulation layer is composed of polyurethane. The whole is environmentally friendly green or yellow, which can be disassembled and repaired.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Water inlet—1" inch external thread.
 4. Water outlet—a 1/4" inch external thread.
 5. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output the volume is 114 liters/minute.
 6. Water pressure—0.2MPA~0.8MPA.
 7. Voltage—220V-250V.
 8. Explosion-proof grade of junction box—Exed IIB T4.
 9. Protection level—IP54.
 10. Water source—clean domestic water.
 11. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(废水回收型)
- ◆ 型号：CN02603C
- ◆ Product name: Explosion-proof electric heat tracing composite eyewash(wastewater recovery type)
- ◆ Model: CN02603C

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~+40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为 1" 304不锈钢球阀。
 - 3、进出水口—均为 1" 英制外螺纹。
 - 4、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 5、水压—0.2MPA~0.8MPA。
 - 6、电压—220V-250V。
 - 7、接线箱防爆等级—Exd IIC T6。
 - 8、防护等级—IP65。
 - 9、水源—洁净的生活用水。
 - 10、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eyewasher is outdoor antifreeze type, and can be used normally within the range of -20℃~+40℃. The whole body is made of PVC. The shell and inner tube are corrosion-resistant 304 stainless steel pipes, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Water inlet and outlet—both are 1" inch external thread.
 4. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output it is 114 liters/minute.
 5. Water pressure—0.2MPA~0.8MPA.
 6. Voltage—220V-250V.
 7. Explosion-proof grade of junction box—Exd IIC T6.
 8. Protection level—IP65.
 9. Water source—clean domestic water.
 10. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(废水回收型)
- ◆ 型号：CN02603D
- ◆ Product name: Explosion-proof electric heat tracing composite eyewash(wastewater recovery type)
- ◆ Model: CN02603D

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为PVC外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色。
- 1、洗眼喷头—为不锈钢材质。
- 2、阀门—冲身阀门为1" 304不锈钢球阀。
- 3、进出水口—均为1" 英制外螺纹。
- 4、洗眼器加装报警闪光灯，使用过程中报警灯有明显的信号指示，可根据用户要求预留DCS接口。
- 5、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
- 6、水压—0.2MPA~0.8MPA。
- 7、电压—220V-250V。
- 8、接线箱防爆等级—Exd IIC T6。
- 9、防护等级—IP65。
- 10、水源—洁净的生活用水。
- 11、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eyewasher is outdoor antifreeze type, which can be used normally within the range of -20℃~-40℃. The whole body is made of PVC. The shell and inner tube are corrosion-resistant 304 stainless steel pipes, wound by a high-performance heating electric heating cable, and an insulation layer composed of polyurethane, the whole is environmentally friendly green or yellow.
- 1. Eyewash nozzle—made of stainless steel.
- 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
- 3. Water inlet and outlet—both are 1" inch external thread.
- 4. The eyewash unit is equipped with an alarm flashing light, and the alarm light has obvious signal instructions during use, which can be according to user requirements reserve the DCS interface.
- 5. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output it is 114 liters/minute.
- 6. Water pressure—0.2MPA~0.8MPA.
- 7. Voltage—220V-250V.
- 8. Explosion-proof grade of junction box—Exd IIC T6.
- 9. Protection level—IP65.
- 10. Water source—clean domestic water.
- 11. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：防爆电伴热型复合式洗眼器(可拆卸型)
- ◆ 型号：CN02603E
- ◆ Product name: Explosion-proof electric heating type composite eyewash(removable type)
- ◆ Model: CN02603E

G 技术参数:

- ◆ 此款洗眼器为室外防冻型，可在-20℃~-40℃范围内正常使用，通体为不锈钢外壳，内管为耐腐蚀304不锈钢管材，由可加热的高性能电伴热带缠绕，保温层由聚氨酯组成，整体为环保绿色或黄色，可分解拆卸维修。
- 1、洗眼喷头—为不锈钢材质。
 - 2、阀门—冲身阀门为1" 304不锈钢球阀。
 - 3、进水口—为1" 英制外螺纹。
出水口—为1/4" 英制外螺纹。
 - 4、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
 - 5、水压—0.2MPA~0.8MPA。
 - 6、电压—220V-250V。
 - 7、接线箱防爆等级—Exd IIB T4。
 - 8、防护等级—IP65。
 - 9、水源—洁净的生活用水。
 - 10、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ This eyewasher is outdoor antifreeze type, can be used normally within the range of -20℃~-40℃, the whole body is stainless steel the outer shell and the inner tube are corrosion-resistant 304 stainless steel pipes, wound by a high-performance heating electric tracing cable for heat preservation the layer is composed of polyurethane, and the whole is environmentally friendly green or yellow, which can be disassembled and repaired.
1. Eyewash nozzle—made of stainless steel.
 2. Valve—The punching valve is a 1" 304 stainless steel ball valve.
 3. Water inlet—1" inch external thread.
Outlet — is 1/4" inch external thread.
 4. Flow rate—according to different pipeline pressures, the flow rate changes accordingly. Within the specified water pressure range, the maximum water output it is 114 liters/minute.
 5. Water pressure—0.2MPA~0.8MPA.
 6. Voltage—220V-250V.
 7. Explosion-proof grade of junction box—Exd IIB T4.
 8. Protection level—IP65.
 9. Water source—clean domestic water.
 10. Use environment—places where hazardous materials splash, polluted Environments, a place where explosion or combustion may occur.



- ◆ 品名：电伴热冲淋洗眼房
- ◆ 型号：CN02001
- ◆ Product name: Electric heat tracing shower eye room
- ◆ Model: CN02001

G 技术参数:

- ◆ 洗眼房是专为特殊环境而设计的集洗眼、冲淋、废水回收于一身的装置，适合安装在电子行业净化车间，和需要将废水集中处理的场地。
- 1、外形尺寸—长1520mm×宽1400mm×高2400mm(可根据客户要求定做)。
- 2、材质—可定做不锈钢、碳钢、透明钢化玻璃、有机玻璃等。
- 3、底部—有不锈钢集水槽，外设出水口接通排水管道。
- 4、冲眼喷头—为不锈钢材质。
- 5、阀门—冲身阀门为1" 304不锈钢球阀。
冲眼阀门为1/2" 304不锈钢球阀。
- 6、进水口—为1" 英制外螺纹。
出水口—为1 1/4" 英制外螺纹。
- 7、流量—根据管道压力不同，其流量随之变化，在规定的水压范围内，最大出水量为114升/分钟。
- 8、水压—0.2MPA~0.8MPA。
- 9、电压—220V-250V。
- 10、接线箱防爆等级—Exed IIB T4。
- 11、防护等级—IP54。
- 12、水源—洁净的生活用水。
- 13、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ The eye wash room is the device that specially designed for special environment integrates eye wash, shower, wastewater recycling in one device.it is suitable for installation in the purification workshop of the electronics industry and the site where waste water needs to be treated centrally.
- 1. Dimensions—length 1520mm×width 1400mm×height 2400mm(can be customized according to customer requirements).
- 2. Material—stainless steel, carbon steel, transparent tempered glass, plexiglass, etc. can be customized.
- 3. At the bottom—there is a stainless steel water collection tank, and the external water outlet is connected to the drainage pipe.
- 4. Punching nozzle—made of stainless steel.
- 5. Valve—The punching valve is a 1" 304 stainless steel ball valve. the punching valve is a 1/2" 304 stainless steel ball valve.
- 6. Water inlet—1" inch external thread. outlet—for 1 1/4" inch external thread.
- 7. Flow rate—the flow rate varies according to the pressure of the pipe, within the specified water pressure range,the maximum water output is 114 liters/ min.
- 8. Water pressure—0.2MPA~0.8MPA.
- 9. Voltage—220V-250V.
- 10. Explosion-proof grade of junction box—Exed IIB T4.
- 11. Protection level—IP54.
- 12. Water source—clean domestic water.
- 13. Use environment—places where hazardous materials splash,polluted Environments,a place where explosion or combustion may occur.



- ◆ 品名：防冰型不锈钢冲淋洗眼房
- ◆ 型号：CN02002
- ◆ Product name: Anti-icing stainless steel shower eye wash room
- ◆ Model: CN02002

G 技术参数：

- ◆ 洗眼房是专为特殊环境而设计的集洗眼、冲淋、废水回收于一身的装置，适合安装在电子行业净化车间使用，和需要将废水集中处理的场地。
- 1、外形尺寸—长1520mm×宽1400mm×高2400mm(可根据客户要求定做)。
- 2、材质—可定做不锈钢、碳钢、透明钢化玻璃、有机玻璃等。
- 3、底部—有不锈钢集水槽，外设出水口接通排水管道。
- 4、阀门—冲眼阀门为 $1/2$ " 304不锈钢镀锌球阀。
- 5、管材—通体为耐腐蚀304不锈钢管材。
- 6、进出水口—均为1" 英制外螺纹。
- 7、水压—0.2MPA~0.8MPA。
- 8、水源—洁净的生活用水。
- 9、使用环境—有危险物品喷溅的地方，有污染的环境，可能发生爆炸或燃烧的地方。

G Technical Parameters:

- ◆ The eyewash room is a device specially designed for special environments that integrates eyewashing, flushing, and waste water recycling. It is suitable for it is installed in the purification workshop of the electronics industry and the site where waste water needs to be treated centrally.
- 1. Dimensions—length 1520mm×width 1400mm×height 2400mm (can be customized according to customer requirements).
- 2. Material—stainless steel, carbon steel, transparent tempered glass, plexiglass, etc. can be customized.
- 3. At the bottom—there is a stainless steel water collection tank, and the external water outlet is connected to the drainage pipe.
- 4. Valve—The punching valve is $1/2$ " 304 stainless steel galvanized ball valve.
- 5. Pipe material—the whole body is corrosion-resistant 304 stainless steel pipe.
- 6. Water inlet and outlet—both are 1" inch external threads.
- 7. Water pressure—0.2MPA~0.8MPA.
- 8. Water source-clean domestic water.
- 9. Use environment—places where hazardous materials splash,polluted Environments,a place where explosion or combustion may occur.



- ◆ 品名：加压便携式洗眼器
- ◆ 型号：CN02901
- ◆ Product name: Pressurized portable eyewash
- ◆ Model: CN02901

G 技术参数:

- 1、冲眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、规格—直径325mm、高度1150mm。
- 3、材质—优质耐腐蚀304不锈钢。
- 4、使用温度—10°C~37°C，如温度低于10°C请注意采取保温措施，当高于37°C，请不要冲洗眼部以免烫伤，使之降温后方可使用。
- 5、工作压力—此款洗眼器通过气压供水方式来提供水压，正常空气压力0.6MPA。
- 6、出水压力—由流量调节阀门调控压力，在0.2MPA~0.6MPA之间。
- 7、水源—建议使用纯净水，可通过顶部进水口将水加入罐中，加水量为45L。

G Technical Parameters:

1. Punch nozzle—made of stainless steel, equipped with a stainless steel filter screen, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Specifications—diameter 325mm, height 1150mm.
3. Material—high-quality corrosion-resistant 304 stainless steel.
4. The operating temperature is—10°C~37°C. If the temperature is lower than 10°C, please take heat preservation measures. When it is higher than 37°C, Please don't rinse your eyes to avoid scalding, let it cool down before use.
5. Working pressure—This eyewash device provides water pressure through air pressure water supply, and the normal air pressure is 0.6MPA.
6. Water outlet pressure—the pressure is regulated by the flow regulating valve, between 0.2MPA and 0.6MPA.
7. Water source—It is recommended to use pure water, which can be added to the tank through the top water inlet, and the amount of water added is 45L.



- ◆ 品名：加压便携式防爆保温型洗眼器(废水回收型)
- ◆ 型号：CN02901A
- ◆ Product name: Pressurized, portable, explosion-proof and heat-preserving eyewash(wastewater recovery type)
- ◆ Model: CN02901A

G 技术参数:

- 1、冲眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、规格—直径325mm、高度1200mm。
- 3、材质—优质耐腐蚀304不锈钢。
- 4、使用温度—10°C~37°C，如温度低于10°C请注意采取保温措施，当高于37°C，请不要冲洗眼部以免烫伤，使之降温后方可使用。
- 5、工作压力—此款洗眼器通过气压供水方式来提供水压，正常空气压力0.6MPA。
- 6、出水压力—由流量调节阀门调控压力，在0.2MPA~0.6MPA之间
- 7、水源—建议使用纯净水，可通过顶部进水口将水加入罐中，加水量为45L。
- 8、洗眼器接入220V电源即可实现电加热保温功能。

G Technical Parameters:

1. Punch nozzle—made of stainless steel, equipped with a stainless steel filter screen, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Specifications—diameter 325mm, height 1200mm.
3. Material—high-quality corrosion-resistant 304 stainless steel.
4. The operating temperature is—10°C~37°C. If the temperature is lower than 10°C, please take heat preservation measures. When it is higher than 37°C, Please don't rinse your eyes to avoid scalding, let it cool down before use.
5. Working pressure—This eyewash device provides water pressure through air pressure water supply, and the normal air pressure is 0.6MPA.
6. Outlet pressure—the pressure is regulated by the flow regulating valve, between 0.2MPA~0.6MPA
7. Water source—It is recommended to use pure water, which can be added to the tank through the top water inlet, and the amount of water added is 45L.
8. When the eyewash is connected to 220V power supply, it can realize electric heating and heat preservation function.



- ◆ 品名：加压便携式冲淋洗眼器
- ◆ 型号：CN02903
- ◆ Product name: Pressurized portable shower eyewash
- ◆ Model: CN02903

G 技术参数:

- 1、冲眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、规格—直径325mm、高度2200mm。
- 3、材质—优质耐腐蚀304不锈钢。
- 4、阀门—冲身阀门为 $\frac{3}{4}$ " 不锈钢球阀。
冲眼阀门为 $\frac{1}{2}$ " 不锈钢球阀。
- 5、使用温度— $10^{\circ}\text{C}\sim 37^{\circ}\text{C}$ 如温度低于 10°C 请注意采取保温措施，当高于 37°C ，请不要冲洗眼部以免烫伤，使之降温后方可使用。
- 6、工作压力—此款洗眼器通过气压供水方式来提供水压，正常空气压力0.6MPA。
- 7、出水压力—由流量调节阀门调控压力，在0.2MPA~0.6MPA之间。
- 8、水源—建议使用纯净水，可通过顶部进水口将水加入罐中，加水量为45L。

G Technical Parameters:

1. Punch nozzle—made of stainless steel, equipped with a stainless steel filter screen, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Specifications—diameter 325mm, height 2200mm.
3. Material—high-quality corrosion-resistant 304 stainless steel.
4. Valve—The punch valve is a $\frac{3}{4}$ " stainless steel ball valve.
The punching valve is a $\frac{1}{2}$ " stainless steel ball valve.
5. Operating temperature— $10^{\circ}\text{C}\sim 37^{\circ}\text{C}$ If the temperature is lower than 10°C , please take heat preservation measures, when it is higher than 37°C , please Do not rinse the eyes to avoid burns, let them cool down before use.
6. Working pressure—This eyewash device provides water pressure through air pressure water supply, and the normal air pressure is 0.6MPA.
7. Outlet pressure—The pressure is regulated by the flow regulating valve, between 0.2MPA and 0.6MPA.
8. Water source—It is recommended to use pure water, which can be added to the tank through the top water inlet, and the amount of water added is 45L.



- ◆ 品名：加压便携式防爆保温型冲淋洗眼器
- ◆ 型号：CN02903A
- ◆ Product name: Pressurized portable explosion-proof heat preservation type shower eyewash
- ◆ Model: CN02903A

G 技术参数:

- 1、冲眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、规格—直径325mm、高度2200mm。
- 3、材质—优质耐腐蚀304不锈钢。
- 4、阀门—冲身阀门为 $\frac{3}{4}$ " 不锈钢球阀，
冲眼阀门为 $\frac{1}{2}$ " 不锈钢球阀。
- 5、使用温度— $10^{\circ}\text{C}\sim 37^{\circ}\text{C}$ 如温度低于 10°C 请注意采取保温措施，当高于 37°C ，请不要冲洗眼部以免烫伤，使之降温后方可使用。
- 6、工作压力—此款洗眼器通过气压供水方式来提供水压，正常空气压力0.6MPA。
- 7、出水压力—由流量调节阀门调控压力，在0.2MPA~0.6MPA之间。
- 8、水源—建议使用纯净水，可通过顶部进水口将水加入罐中，加水量为45L。
- 9、洗眼器接入220V电源即可实现电加热保温功能。

G Technical Parameters:

1. Punch nozzle—made of stainless steel, equipped with a stainless steel filter screen, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Specifications—diameter 325mm, height 2200mm.
3. Material—high—quality corrosion-resistant 304 stainless steel.
4. Valve—The punch valve is a $\frac{3}{4}$ " stainless steel ball valve.
The punching valve is a $\frac{1}{2}$ " stainless steel ball valve.
5. Operating temperature— $10^{\circ}\text{C}\sim 37^{\circ}\text{C}$ If the temperature is lower than 10°C , please take heat preservation measures, when it is higher than 37°C , please Do not rinse the eyes to avoid burns, let them cool down before use.
6. Working pressure—This eyewash device provides water pressure through air pressure water supply, and the normal air pressure is 0.6MPA.
7. Outlet pressure—The pressure is regulated by the flow regulating valve, between 0.2MPA and 0.6MPA.
8. Water source—It is recommended to use pure water, which can be added to the tank through the top water inlet, and the amount of water added is 45L.
9. When the eyewash is connected to 220V power supply, it can realize electric heating and heat preservation function.



- ◆ 品名：不锈钢壁挂式洗眼器
- ◆ 型号：CN02801
- ◆ Product name: Stainless steel wall-mounted eyewash
- ◆ Model: CN02801

G 技术参数:

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—CN02801通体为耐腐蚀304不锈钢管件。
- 4、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
出水口—为 $\frac{1}{4}$ " 英制外螺纹。
- 5、水压—0.2MPA~0.6MPA。
- 6、使用环境—危险品作业的场所。

G Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—CN02801 is made of corrosion-resistant 304 stainless steel pipe fittings.
4. Water inlet— $\frac{1}{2}$ " inch internal thread.
Outlet—it is $\frac{1}{4}$ " inch external thread.
5. Water pressure—0.2MPA~0.6MPA.
6. Use environment—the place where dangerous goods are operated.



- ◆ 品名：壁挂式洗眼器
- ◆ 型号：CN02802
- ◆ Product name: Wall-mounted eyewash
- ◆ Model: CN02802

C 技术参数：

- 1、洗眼喷头—为不锈钢材质，配有不锈钢过滤网，可形成柔和的汽泡式水流，更为有效的对眼睛内有害物质快速冲洗，同时降低对眼睛的再次伤害。
- 2、阀门—冲眼阀门为 $\frac{1}{2}$ " 304不锈钢球阀。
- 3、管材—CN02802金属管材外加防腐涂层。
- 4、进水口—为 $\frac{1}{2}$ " 英制内螺纹。
出水口—为 $\frac{1}{4}$ " 英制外螺纹。
- 5、水压—0.2MPA~0.6MPA。
- 6、使用环境—危险品作业的场所。

C Technical Parameters:

1. Eyewash nozzle—made of stainless steel, equipped with a stainless steel filter, can form a soft bubble water flow, more in order to effectively rinse the harmful substances in the eyes and reduce the damage to the eyes again.
2. Valve—The punching valve is a $\frac{1}{2}$ " 304 stainless steel ball valve.
3. Pipe material—CN02802 metal pipe with anti-corrosion coating.
4. Water inlet— $\frac{1}{2}$ " inch internal thread.
Outlet—it is $\frac{1}{4}$ " inch external thread.
5. Water pressure—0.2MPA~0.6MPA.
6. Use environment—the place where dangerous goods are operated.



- ◆ 品名：移动便携式推车洗眼器
- ◆ 型号：CN02902
- ◆ Product name: Mobile portable cart eyewash
- ◆ Model: CN02902

G 技术参数:

- 1、功能—洗眼，冲肤，防尘，防冻。
- 2、材质—耐腐ABS塑料。
- 3、工作压力—0.2MPa~0.4MPa。
- 4、流量—2.0-3.0L/Min。
- 5、适用条件—常温生活用水。
- 6、执行标准—参照ANSI-Z358.1-2009/DIN-12899标准生产。

G Technical Parameters:

1. Function—wash the eyes, rinse the skin, prevent dust and freeze.
2. Material—Corrosion-resistant ABS plastic.
3. Working pressure—0.2MPa~0.4MPa.
4. Flow rate—2.0-3.0L/Min.
5. Applicable conditions—domestic water at room temperature.
6. Executive standard—produce according to ANSI-Z358.1-2009/DIN-12899 standard.



- ◆ 品名：加压便携式推车洗眼器
- ◆ 型号：CN02904
- ◆ Product name: Pressurized portable cart eyewash
- ◆ Model: CN02904

G 技术参数：

- 1、产品材质—优质ABS工程塑料。
- 2、标准箱的液体容量：12LT，最大容量：15LT，压力3Bar，重量：3:5kg；
流速—0.32-0.40L/秒；软管长度：2.5米。
- 3、流量—水流可持续15分钟以上。
- 4、性能—超强抗酸、碱、盐、油类等化学品物质腐蚀。
- 5、产品特点—无需安装，出水状态可调节为雾状和柱状，移动推车适合无水源地方使用，加推车移动更加方便。

G Technical Parameters:

1. Product material—high-quality ABS engineering plastics.
2. Liquid capacity of standard tank: 12LT, maximum capacity: 15LT, pressure 3Bar, weight: 3: 5kg; flow rate: 0.32-0.40L/sec; hose length: 2.5 meters.
3. Flow rate—The water flow can last for more than 15 minutes.
4. Performance—Super strong resistance to acid, alkali, salt, oil and other chemical substances.
5. Product features—No need to install, the water outlet state can be adjusted to fog or column, and the mobile cart is suitable for places with no water source it is more convenient to use when adding a cart.



- ◆ 品名：无毒聚乙烯推车式洗眼器
- ◆ 型号：CN02903
- ◆ Product name: Non-toxic polyethylene trolley eyewash
- ◆ Model: CN02903

产品简介：

- ◆ 当发生有毒有害物质(如化学液体等) 喷溅到工作人员身体、眼睛、脸部或者发生火灾引起的工作人员衣物着火时，采用的一种迅速将危害降到最低的有效的安全防护产品。

Product Brief:

- ◆ When toxic and harmful substances (such as chemical liquids, etc.) are sprayed on the body, eyes, and faces of the staff, or the staff's clothing catches due to a fire, an effective safety protection product that quickly minimizes the hazard is adopted.

安装便捷，经久耐用

- ◆ 无毒聚乙烯便捷式洗眼器，安装便捷，经久耐用，密度好强度高。

Convenient installation and durable

- ◆ Non-toxic polyethylene portable eyewash, easy to install, durable, good density and high strength.





无毒聚乙烯
Non-toxic polyethylene

- ◆ 无毒聚乙烯材质，安全无毒。
- ◆ Non-toxic polyethylene material, safe and non-toxic.



双口冲洗
Double mouth rinse

- ◆ 柔和出水，双层过滤，避免眼睛二次伤害，让冲洗也成为一种享受。
- ◆ The soft effluent, double-layer filtration, avoids secondary damage to the eyes, and makes rinsing a pleasure.



加厚手弧
Thickened hand arc

- ◆ 实时显示，超低功耗设计，正常使用期间无需更换电池
- ◆ Real-time display, ultra-low power consumption design, no need to replace the battery during normal use

G 性能参数 Performance parameter

| 电气参数 Electrical parameters | |
|----------------------------|-------------------------------------------------------------|
| 商品品牌 Product brand | 中油防爆 CNPGEx |
| 商品型号 Product model | 双口洗眼器-6650移动式 Double mouth eyewash-6650 mobile |
| 商品材质 Product quality | 聚乙烯 Polyethylene |
| 喷头相距 Nozzle distance | 150-170(mm)以实物为准 150-170 (mm) subject to the actual product |
| 功能特点 Features | 紧急洗眼 Emergency eye wash |
| 开启方式 Open method | 手动式 Manual |
| 水 压 Water pressure | 0.20-0.40MpaG |
| 水 流 Water flow | 喷淋: 2.0-3.0 /洗眼: 0.2-0.3 Spray: 2.0-3.0 / Eyewash: 0.2-0.3 |
| 适用条件 Applicable conditions | 常温生活用水、纯净水 Room temperature domestic water, purified water |
| 制作标准 Production standard | ANSI-Z385-1-1990/DIN-18299 |

- ◆ 机器外形、技术参数性能及特点如有更改，恕不另行通知，未经本公司明确书面许可，不得翻印或传播有关资料。
- ◆ The appearance, technical parameters, performance and characteristics of the machine are subject to change without notice. Reprinting or dissemination of relevant materials is not allowed without the express written permission of the company.



- ◆ 品名：加压便携式双口洗眼器
- ◆ 型号：CN02905
- ◆ Product name: Pressurized portable double-mouth eyewash
- ◆ Model: CN02904

G 技术参数:

- 1、无安装要求，可根据现场需要安装或直接使用。
- 2、出水孔处预留充足空间，可冲洗眼睛及面部，必要时可用手协助冲洗。
- 3、材质为无毒聚乙烯，容器配有减压阀使水流稳定，加纯净水5升，每90天应换纯净水及加气，加气用手推约10次2.5MPA，可供持续水流15分钟。

G Technical Parameters:

1. No installation requirements, it can be installed or used directly according to site needs.
2. Reserve sufficient space at the water outlet to wash the eyes and face. if necessary, use your hands to assist in washing.
3. The material is non-toxic polyethylene. The container is equipped with a pressure reducing valve to stabilize the water flow. Add 5 liters of purified water and change it every 90 days. Purified water and refilling, refilling by hand, about 10 times 2.5MPA, can be used for continuous water flow for 15 minutes.



- ◆ 品名：单头台式洗眼器/双头台式洗眼器
- ◆ 型号：CN02701/CN02702
- ◆ Product name: Single-head desktop eyewash/double-head desktop eyewash
- ◆ Model: CN02701/CN02702

C 技术参数：

- ◆ 台式洗眼器是用于迅速清洗附着于人体上有害物质的多用途清洁设备。它不仅
可以清洗进入眼部的有害物质，也可以拿起冲洗身上的有害附着物，是一种方
便实用的洗消装置。

- 1、底座—丝扣直径28mm、内径19mm、长度110mm。
- 2、水管—长1500mm，连接丝扣4分。
- 3、水压—0.2MPA~0.6MPA。

C Technical Parameters:

- ◆ The desktop eyewash is a multi-purpose cleaning device used to quickly
clean harmful substances attached to the human body. It can not only clean
into the eye harmful substances, also can be picked up to wash the body of
harmful attachments, It is a convenient and practical washing device.

1. Base—Threaded button diameter is 28mm, inner diameter is 19mm, and
length is 110mm.
2. Water pipe—length 1500mm, 4 minutes of connecting thread.
3. Water pressure—0.2MPA~0.6MPA.

救援三脚架 Rescue tripod

浙江中油防爆电气有限公司是国内一家专业生产救援三脚架的企业，我们针对国外救援三脚架产品价格高，国内用户不易接受的特点，特研制开发了CN01101系列救援三脚架产品。本产品适用于高处、悬崖及密闭空间作业，常见密闭空间有各类储罐、容器、反应釜、铁路罐车、舰艇船舱、密闭运输通道、地下管道（如电缆沟）、烟道、隧道、粮食筒仓、坑槽、竖井、纸浆池、污水池、下水道、地窖、化粪池、污水井、污水渠等，多数为非常规、非连续作业的场所。广泛应用于消防、市政、救援机构。

Zhejiang Oil explosion-proof Electric Co., Ltd is a professional production of rescue tripod enterprises, we aimed at the characteristics that domestic users are not easy to accept the high price of foreign rescue tripod products, company specially has developed the CN01101 series rescue tripod products. It is suitable for high places, cliffs and confined spaces, Common confined space, there are various storage tanks, containers, reactors, railway tank cars, naval cabins, closed transportation channels, underground pipelines (such as cable trenches), flues, tunnels, Grain silos, pits, shafts, pulp ponds, sewage tanks, sewers, cellars, septic tanks, sewage wells, sewers, etc., most of them are unconventional and non-continuous operations place. It is widely used in firefighting, municipal and rescue agencies.






- ◆ 品名：救援三脚架(密闭空间作业)
- ◆ 型号：CN01101
- ◆ Product name: Rescue tripod (operating in confined space)
- ◆ Model: CN01101

G 一、三脚架适用范围 The scope of application of the tripod

- ◆ 三脚架适用于高处、悬崖及密闭空间作业，常见密闭空间有各类储罐、容器、反应釜、铁路罐车、舰艇船舱、密闭运输通道、地下管道(如电缆沟)、烟道、隧道、粮食筒仓、坑槽、竖井、纸浆池、污水池、下水道、地窖、化粪池、污水井、污水渠等，多数为非常规、非连续作业的场所。广泛应用于消防、市政、救援机构。
- ◆ The tripod is suitable for high places, cliffs and confined spaces. Common confined spaces include various storage tanks, containers, reactors, railway tank cars, ship cabins, airtight transportation channels, underground pipelines (such as cable trenches), flues, tunnels, grain silos, pits, shafts, pulp ponds, sewage tanks, sewers, cellars, septic tanks, sewage water wells, sewers, etc, most of them are unconventional and non-continuous operations. widely used in fire protection, municipal administration, rescue agency.

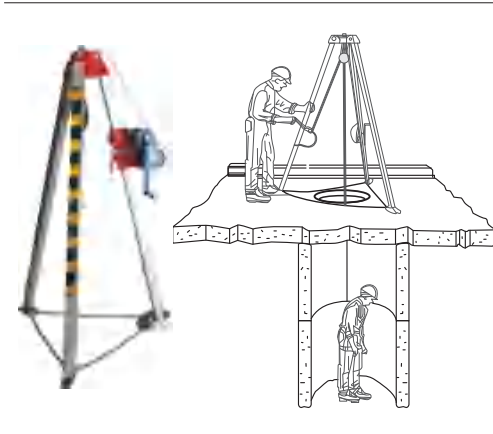


G 二、三脚架主要结构及特点 The main structure and characteristics of the tripod

- ◆ 由主体、吊索、绞盘、环型保护链组成。
- ◆ 采用高强度轻质合金制造的可伸缩支脚，安全系数大于10，底脚设有环型保护链。
- ◆ 绞盘上设有上升、下降自锁装置，保证了吊索的安全性。
- ◆ 吊索选用特制的不锈钢钢丝绳，柔韧度好，且不会因锈蚀或缺油造成钢索损坏。
- ◆ 方便的装配，可因地制宜的装置在井口、坑口、且不受地面高低不平的限制。
- ◆ Composed of main body, sling, winch, and ring-shaped protection chain.
- ◆ The retractable feet are made of high-strength lightweight alloy, with a safety factor greater than 10, and the feet are equipped with ring-shaped protectors guard chain.
- ◆ The winch is equipped with ascending and descending self-locking devices to ensure the safety of the sling.
- ◆ The sling is made of special stainless steel wire rope, which has good flexibility and will not be damaged due to corrosion or lack of oil.
- ◆ Convenient assembly, can be installed in wellheads and pitheads according to local conditions, and is not restricted by the unevenness of the ground.



G 三、三脚架技术指标 The technical indicators of the tripod

- ◆ 最大载荷：≤180Kg
- ◆ 收拢长度：1.65m
- ◆ 撑开长度：2.6m
- ◆ 可调垂直高度范围：1.34m-2.2m
- ◆ 手动柄力：≤500N
- ◆ 钢丝绳长度：30m，可根据客户要求定制
- ◆ Maximum load: ≤180Kg
- ◆ Collapse length: 1.65m
- ◆ Opening length: 2.6m
- ◆ Adjustable vertical height range: 1.34m-2.2m
- ◆ Manual handle force: ≤500N
- ◆ Wire rope length: 30m, can be customized according to customer requirements

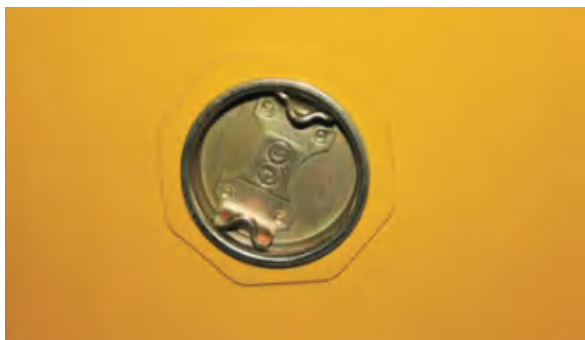

- ◆ 内置有防闭火装置的双透气孔，置于底部及相对应的顶部。
- ◆ Built-in double vents with anti-closed fire device, placed at the bottom and corresponding top.



- ◆ 完全焊接工艺，使产品结构结实牢固，延长使用寿命，并减少空隙，能够在火灾中提供更多的保护。
- ◆ The complete welding process makes the product structure strong and firm, prolongs the service life, and reduces the gap, which can provide more protection in the fire.



- ◆ 柜身底部50mm高的防漏液槽，最大可能的防止化学液体外溢，参照美国EPA要求。
- ◆ The 50mm high leak-proof tank at the bottom of the cabinet can prevent chemical liquids from spilling as much as possible, refer to the requirements of the US EPA.



- ◆ 独特的安全搁板将意外溢出物安全地引导至盛漏槽的后侧和底部。层板可在6cm层档之间上下调节，参照ANSI标准。
- ◆ The unique safety shelf guides accidental spills safely to the back and bottom of the drain tank, the shelf can be adjusted up and down between 6cm layers, referring to ANSI standards.



- ◆ 双锁设计，可根据要求配备安全管理挂锁，进一步保障安全。
- ◆ Double lock design, can be equipped with safety management padlock according to requirements, to further ensure safety.




- ◆ 连续门铰链使关闭顺畅。
- ◆ The continuous door hinge makes the closing smooth.

安全柜 Safety cabinet



| 型号 Model number | CN08004 | CN08012 | CN08022 | CN08030 | CN08045 | CN08060 | CN08090 | CN08110 |
|------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 高×长×宽(mm) Height×length×width(mm) | 561×431×431 | 891×591×461 | 1651×591×461 | 1121×1091×461 | 1161×1091×461 | 11651×861×861 | 1651×1091×861 | 1651×1501×861 |
| 重量 Weight | 35 | 56 | 85 | 100 | 138 | 165 | 190 | 270 |
| 可调层版(个) Adjustable layer version(pcs) | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| 容积(升) Capacity (liter) | 15 | 45 | 83 | 114 | 170 | 227 | 340 | 410 |
| 承重(千克) Bearing capacity (kg) | 50 | 50 | 50 | 50 | 100 | 100 | 100 | 100 |
| 备注 Remark | 单门 Single door | 单门 Single door | 单门 Single door | 双门 Double door | 双门 Double door | 双门 Double door | 双门 Double door | 双门 Double door |

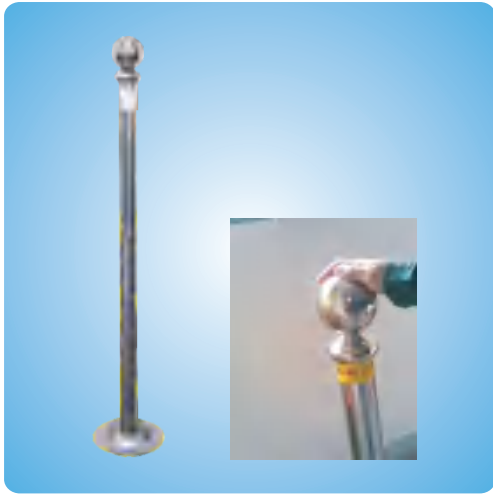

- ◆ 品名：静电释放器
- ◆ 型号：CN1218
- ◆ Product name: Electrostatic discharge device
- ◆ Model: CN1218

G 适用范围:

- ◆ 人体静电释放器是采用一种无源式电路，利用人体上的静电使电路工作，最后达到消除静电的作用。广泛应用于各大油田、加油站、油库及化工企业。

G Technical Parameters:

- ◆ The human body electrostatic discharger adopts a passive circuit, which uses the static electricity on the human body to make the circuit work, and finally achieves the effect of eliminating static electricity. It is widely used in major oil fields, gas stations, oil depots and chemical companies.

G 人体静电释放器的特点:

- ◆ 体积小，重量轻
- ◆ 不需要电源
- ◆ 安装方便
- ◆ 消除静电时无感觉等特点

G Technical Parameters:

- ◆ Small size and light weight
- ◆ No power required
- ◆ Easy to install
- ◆ No feeling when eliminating static electricity



- ◆ 品名：贴地车
- ◆ 型号：CN06101
- ◆ Product name: Ground car
- ◆ Model: CN06101

G 适用范围:

- ◆ 贴地车主要用于贴地警示胶带的现场施工，省去手工平铺的麻烦，大大提高了工作效率。
- ◆ 适用于宽度为50mm-150mm的贴地胶带，也可根据客户要求定做。

G Technical Parameters:

- ◆ The sticking truck is mainly used for the on-site construction of the warning tape sticking to the ground, eliminating the trouble of manual tiling and greatly improving work efficiency.
- ◆ Suitable for floor sticking tape with a width of 50mm-150mm, and can also be customized according to customer requirements.