

本产品手册资料由中油防爆印制，仅用于说明本系列产品的相关信息。中油随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，或对本手册印刷错误及不准确的信息进行必要的改进和更改，恕不另行通知。商家订货时请随时联系本公司，以证实有关信息。

This product manual is printed by CNPC explosion-proof, and is only used to describe the relevant information of this series of products. CNPC may improve the contents of this manual at any time due to technical upgrading or adoption of updated production process, or make mistakes in the printing of this manual. Accurate information is subject to improvement and change without prior notice. Please contact our company at any time to confirm the relevant information.

本画册采用生态纸印刷。珍惜资源，善待环境。

This album is printed on ecological paper. Cherish resources and be kind to the environment.



中油防爆电气(安徽)有限公司

ZHONG YOU EXPLOSION PROOF ELECTRICAL (ANHUI) CO., LTD.

地址：安徽省蒙城县经济开发区纬八路2号

Address: Anhui Province Mengcheng County economic development Zone Weiba Road No. 2

http: //www.zhongyou-ex.com

Tel: 4008-606-956





Ex



防爆通讯设备

Explosion-proof communication device




中油防爆电气(安徽)有限公司
ZHONG YOU EXPLOSION PROOF ELECTRICAL (ANHUI) CO., LTD.





全球防爆电气能效一体化制造商

Global explosion-proof electrical energy efficiency integrated manufacturer

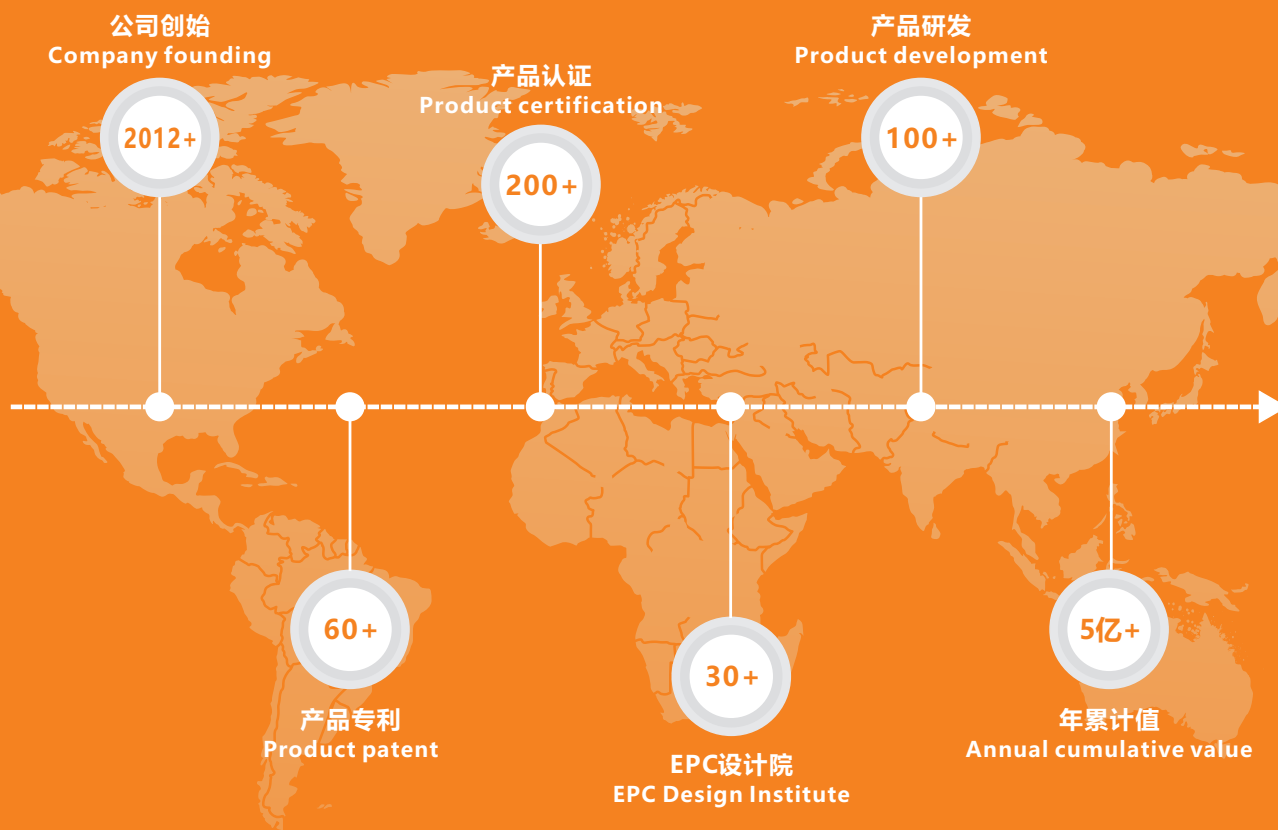

中油防爆感谢您的支持与合作

我们坚持品质管控，研发新型产品，掌握核心技术，满足客户的使用要求，

注重每一个产品细节，制造安全稳定的产品及高效的用户体验！

欢迎使用！

CNPC Explosion-proof appreciates your support and cooperation

We adhere to quality control, research and develop new products, master core technology, meet customer requirements, and focus on every product detail, manufacture safe products and

efficient user experience!

Welcome to use!



公司概况 Company profile

中油防爆成立于2012年，总部座落在中国电气之都浙江温州乐清市柳市镇，总公司为浙江中油防爆电气有限公司，公司已有10多年防爆电气生产经验，产品应用于中石油、中海油、中石化、中化、中航油以及化工领域并赢得客户的认可。根据公司战略规划于2022年成立安徽生产基地，成立中油防爆电气(安徽)有限公司子公司，扩大了产品种类和产能。

我公司是全球防爆电气能效一体化制造商，业务范围：研发、设计、生产、销售、服务、安装、检修、认证等，广泛应用于石油、化工、冶金、航天、煤矿、电力、铁路、船舶、消防、天然气、医药、军工等行业，我公司主要生产和销售固定式和移动式防爆照明灯具、防爆配电、防爆管件、防爆通讯、特殊非标防爆电器等产品。

我公司取得全国工业产品3C强制认证，是中国电器工业协会防爆分会的会员单位，通过了四大体系认证：质量管理体系ISO9001、环境管理体系ISO14001、职业健康安全管理体系18001，售后服务体系，获得了防爆电气设备安装、检修、维护资格证书，为了更好的服务国外市场，公司产品取得了欧盟ATEX CE和EAC认证。

公司以“智能防爆”为中心，研发了智能电伴热控制系统、智能安全帽控制系统、智能照明控制系统、智能疏散照明系统，相关产品满足在数字化工厂的需求和应用。

我们拥有高级研发技术团队，最完善的售前和售后服务队伍，公司生产的防爆产品取得了沈阳、天津、南阳和上海等颁发的证书。

产品的加工工艺和流程严格按照国际质量体系生产，外壳采用压铸铝合金一次性成型、表面处理采用钢珠抛丸和高压静电喷塑、机加工采用数控车床和电脑自动钻攻设备，所有产品外露紧固件全为不锈钢螺丝。

质量是企业的生命，我们严格按照ISO9001-2208、EN13980质量管理体系的规定，制造有要求，检验有标准，过程有记录，责任可追溯，失误必纠正，隐患可预防，问题能有续改进。

Zhongyou Explosion-Proof was established in 2012, with its headquarters located in Liushi Town, Yueqing City, Wenzhou, Zhejiang Province-the "Capital of Electrical Equipment in China". Its parent company is Zhejiang Zhongyou Explosion-Proof Electrical Co., Ltd., with over 10 years of experience in manufacturing explosion-proof electrical equipment. The products have been applied in CNPC (China National Petroleum Corporation), CNOOC (China National Offshore Oil Corporation), Sinopec (China Petroleum & Chemical Corporation), Sinochem Group, China National Aviation Fuel Group, as well as the chemical industry, and have won recognition from customers. In line with the company's strategic planning, a production base was set up in Anhui in 2022, and a subsidiary-Zhongyou Explosion-Proof Electrical (Anhui) Co., Ltd. - was established to expand product categories and production capacity.

Our company is a global integrated manufacturer of explosion-proof electrical energy efficiency solutions. Our business scope covers R&D, design, production, sales, service, installation, maintenance and certification. The products are widely used in petroleum, chemical, metallurgy, aerospace, coal mining, electric power, railway, shipbuilding, fire protection, natural gas, pharmaceutical, military and other industries. We mainly produce and sell fixed and mobile Explosion-proof lighting fixtures, Explosion-proof power distribution equipment, Explosion-proof pipe fittings, Explosion-proof communication equipment, special non-standard Explosion-proof electrical appliances and other products.

The company has obtained the national 3C compulsory certification for industrial products and is a member unit of the ExplosionProof Branch of China Electrical Equipment Industrial Association. It has passed four major system certifications: ISO9001 Quality Management System, ISO14001 Environmental Management System, ISO45001 Occupational Health and Safety Management System, and After-sales Service System. It has also obtained the qualification certificate for installation, maintenance and repair of explosion-proof electrical equipment. To better serve the international market, the company's products have obtained EU ATEX CE certification and EAC certification.

Focusing on the concept of "Intelligent Explosion-Proof", the company has developed intelligent electric tracing heating control systems, intelligent safety helmet control systems, intelligent lighting control systems and intelligent emergency evacuation lighting systems. Relevant products meet the needs and application requirements of digital factories.

We have a senior R&D team and a comprehensive pre-sales and after-sales service team. The Explosion-proof products produced by the company have obtained certificates issued by authorities in Shenyang, Tianjin, Nanyang, Shanghai and other cities.

The processing technology and procedures of the products are strictly in accordance with international quality system standards. The shell is formed by one-time die-casting of aluminum alloy. The surface treatment adopts steel shot blasting and high-pressure electrostatic spraying. The machining process uses CNC lathes and microcomputer automatic drilling and tapping equipment. All exposed fasteners of the products are stainless steel screws.

Quality is the life of an enterprise. We strictly comply with the requirements of ISO9001:2015 and EN13980 quality management systems. We adhere to standardized manufacturing, standardized inspection, documented processes, traceable responsibilities, mandatory correction of errors, preventable hidden dangers and continuous improvement of problems.



总目录 *General information*

W310

防爆手持终端
Explosion-proof handheld terminal

01-02

G63

防爆手持终端
Explosion-proof handheld terminal

03-04

V5EX

5G本安型防爆手机
5G intrinsically safe explosion-proof mobile phone

05-06

EX7087

防爆手持终端
Explosion-proof handheld terminal

07-08

W560

防爆手持终端
Explosion-proof handheld terminal

09-10



防爆|防水|防震|防尘

Explosion-proof|Waterproof|Shockproof|Dustproof

(可定制-行业定制/私人定制服务)

(Customizable-industry customization/private customization service)

W310 防爆手持终端

Explosion-proof handheld terminal

防爆标志: Exib IIC T4 Gb 防爆标专: SYEx20.12424X

Explosion-proof mark: Exib IIC T4 Gb Explosion-proof standard: SYEx20.12424X



Android GO(Oreo)



全网通4G
Full Netcom 4G



四核
Quad core



1+8GB



2.4QVGA



蓝牙
Bluetooth



WiFi



摄像头
Camera



GPS

W310本安型防爆手机|POC公网对讲自定义PTT对讲按键|全网通4G/电信4G/移动4G/联通4G/3G/2G|Android Go(Oreo)|
屏幕英寸2.4QVGA|MTK6739V/CW 1.5GHz四核机身内存1GB RAM+8GB ROM|扩展内存最大(128G)|电池3000mAh|
超长待机|后置200|手电筒|WiFi|蓝牙|IP67

W310 intrinsically safe explosion-proof mobile phone|POC public network intercom custom PTT intercom button|
Full Netcom 4G/Telecom 4G/Mobile 4G/Unicom 4G/3G/2G|Android Go(Oreo)|Screen inch 2.4QVGA|MTK6739V/
CW 1.5GHz quad-core body memory 1GB RAM+8GB ROM|Maximum extended memory (128G)|Battery 3000mAh|
Long standby|rear 200|flashlight|WiFi|Bluetooth|IP67

产品规格 Product Specifications >>

物理参数 Physical parameter	
三防标准 Three-proof standard	IP67
IP68防护 IP68 Protection	防水、防尘、防震 Waterproof, dustproof and shockproof
外观 Exterior	直板 Straight board
颜色 Color	橙黑色 Orange black
重量 Weight	199.7g
尺寸 Size	138.8*60.9*21.3(mm)

性能参数 Performance parameter	
CPU	MTK6739V/CW1四核1.5GHz MTK6739V/CW1 quad-core 1.5GHz
RAM+ROM	1GB+8GB
TF卡 TF card	最大支持128GB Maximum support 128GB
操作系统 Operating system	Android GO(Oreo)

屏幕参数 Screen parameters	
屏幕尺寸 Screen size	2.4QVGA
分辨率 Resolution	320 * 240
触摸屏 Touch screen	单点电容式 Single point capacitive

摄像头 Camera	
后置 Rear	200万像素 2 Million pixels
闪光灯 Flash	高亮闪光灯LED手电筒功能 Highlight flash LED flashlight function

数据网络 Data network	
网络 Network	GSM:B2/B3/B5/B8 WCDMA:B1/B2/B5/B8 TDS:B34/B39 CDMA:BCO 1X EVDO FDD:B1/B3/B5/B7/B8/B20 TDD:B38/B39/B40/B41
蓝牙 Bluetooth	蓝牙 4.2 Bluetooth 4.2
WiFi	2.4 G WiFi
NFC	支持(选配) Support (optional)
收音机 Radio	支持 Support
GPS	GPS/GLONASS/Bei dou

产品特性 Product Features	
公网对讲 Public network intercom	全球POC公网对讲、无距离对讲可快捷异地便捷通讯(单呼、组呼、群呼、广播、一呼百应) Global POC public network intercom, no distance intercom can be fast convenient communication in different places (single call, group call, group call, Broadcast, one call a hundred responses)

电源与电池 Power and battery	
充电接口 Charging port	Micro USB
电池容量 battery capacity	3000mAh



注：以上参数仅供参考，我公司可能会针对市场变化进行产品优化，谨请理解。
Note: The above parameters are for reference only. Our company may optimize products according to market changes. Please kindly understand.



防爆|防水|防震|防尘

Explosion-proof|Waterproof|Shockproof|Dustproof

(可定制-行业定制/私人定制服务)

(Customizable-industry customization/private customization service)

G63 防爆手持终端

Explosion-proof handheld terminal

防爆标志: Exib IIC T4 Gb/Exib D21 T130°C

Explosion-proof mark: Exib IIC T4 Gb/Exib D21 T130°C



安卓10

Android10



移动/联通

China Mobile/
Unicom



八核

Eight core



6/8+128GB

6/8+128GB



6.3英寸

6.3 inches



蓝牙

Bluetooth



WiFi

WiFi



摄像头

Camera



NFC

NFC



指纹

Fingerprint



定位

GPS



IP68防护

IP68 Protection

中油防爆手持终端 | 全网通移动4G | 联通4G电信4G | 3G | 2G | 双卡双待 | Android 10系统 | 屏幕6.3英寸大猩猩玻璃水滴FHD + 电容式触摸屏, 2340 * 1080 | MediaTek Helio P60MT6771 Cortex A73/A53 八核, 2.05GHz机身内存6GB/8GB RAM+128GB ROM | 扩展内存支持(128G) 超长待机 | 电池6000mAh | 前置24MP(F/2.0)后置四摄48MP AI + 16MP广角+5MP微距+5MP景深 | IP-68防水 | 防震 | 防尘认证 | NFC近场通信技术 | OTG功能 | 指纹识别 | 导航GLONASS / Galileo
CNPC Explosion-proof handheld terminal | All Netcom Mobile 4G | China Unicom 4G Telecom 4G | 3G | 2G | Dual SIM Dual Standby | Android 10 System | 6.3-inch Gorilla Glass water drop FHD + capacitive touch screen, 2340 * 1080 | MediaTek Helio P60MT6771 Cortex A73/A53 octa-core, 2.05GHz body memory 6GB/8GB RAM+128GB ROM | extended memory support (128G) long standby | battery 6000mAh | front 24MP (F/2.0) rear quad 48MP AI + 16MP Wide Angle + 5MP Macro + 5MP Depth of Field | IP-68 Waterproof | Shockproof | Dustproof Certification | NFC Near Field Communication Technology | OTG Function | Fingerprint Recognition | Navigation GLONASS / Galileo

产品规格Product Specifications >>

物理参数 Physical parameter	
三防标准 Three-proof standard	IP68/ IP69K防水 IP68/ IP69K waterproof
IP68防护 IP68 Protection	防水、防尘、防震 Waterproof, dustproof and shockproof
外观 Exterior	直板 Straight board
颜色 Color	橙黑色 Orange black
重量 Weight	250g
尺寸 Size	162.5*79.9*12.8(mm)

性能参数 Performance parameter	
CPU	Helio P60 MT6771 八核, 2.1GHz Helio P60 MT6771 eight-core, 2.1GHz
CPU工艺	12nm工艺 12nm process
RAM+ROM	6GB+128GB 8GB+128GB
TF卡 TF card	最大支持128GB Maximum support 128GB
操作系统 Operating system	Android 10

屏幕参数 Screen parameters	
屏幕尺寸 Screen size	6.3英寸大猩猩玻璃水滴FHD+ 6.3 inch Gorilla Glass Water Drop FHD+
分辨率 Resolution	2340 * 1080
触摸屏 Touch screen	电容式触摸屏 Capacitive touch screen


摄像头 Camera	
后置四摄 Rear four cameras	48MP AI+16MP广角+5MP微距+5MP景深 48MP AI+16MP wide-angle+5MP macro+5MP depth of field
前置 Front-Facing	2400万像素 24 million pixels
闪光灯 Flash	支持可当手电筒功能 Support can be used as a flashlight function

数据网络 Data network	
WWAN	GSM 850/900/1800/1900MHz WCDMA B1/B2/B4/B5/B6/B8/B19 TD-SCDMA:B34/B39
	FDD-LTE:B1/B2/B3/ B4/B5/B7/B8/ B12/B13/B17/B18/B19/B20/ B26/B28AB/B66
	TDD-LTE:B34/B38/B39/B40/B41
蓝牙 Bluetooth	蓝牙 4.2 Bluetooth 4.2
WiFi	支持 Support
NFC	发射频率:13.56MHz Transmit frequency: 13.56MHz
OTG	支持 Support
GPS	GLONASS / Galileo

产品特性 Product Features	
公网对讲 Public network intercom	POC公网对讲 POC public network intercom
自定义按键 Custom button	支持 Support

传感器 Sensor	
指纹识别 Fingerprint recognition	支持 Support
光线感应 Light sensor	支持 Support
近距离传感器 Proximity sensor	支持 Support
陀螺仪 Gyro	支持 Support
电子罗盘 Electronic compass	支持 Support
气压计 Gas pressure gauge	支持 Support
加速度计 Accelerometer	支持 Support

充电方式 Charging method	
USB	Type-C
电池容量 Battery capacity	6000mAh

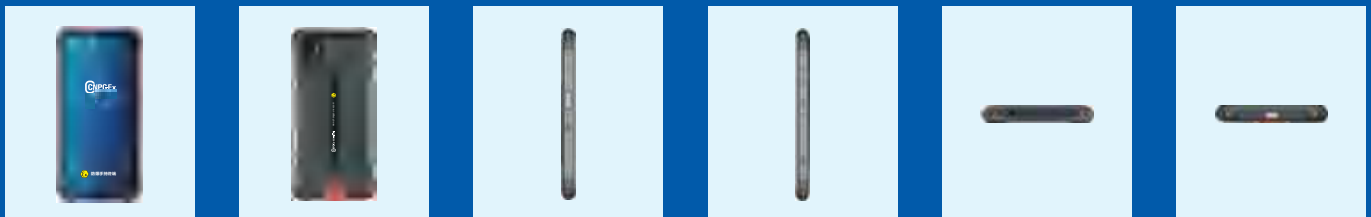

注：以上参数仅供参考，我公司可能会针对市场变化进行产品优化，谨请理解。
Note:The above parameters are for reference only. Our company may optimize products according to market changes. Please kindly understand.



V5EX 

5G本安型防爆手机

5G intrinsically safe explosion-proof mobile phone

(可定制-行业定制/私人定制服务)

(Customizable-industry customization/private customization service)

防爆证号: CLEx21.7699X 防爆标志: Exib IIC T4 Gb

Explosion-proof certificate number: CLEx21.7699X Explosion-proof mark: Exib IIC T4 Gb



安卓10
Android10



移动/联通/电信
China Mobile/
Unicom/Telecom



八核
Eight core



8+128GB



6.58英寸
6.58inches



蓝牙
Bluetooth



WiFi



摄像头
Camera



NFC



指纹
Fingerprint



定位
GPS

产品规格Product Specifications >>

物理参数 Physical parameter	
外观 Exterior	直板 Straight board
颜色 Color	多选 Multiple Choices
重量 Weight	约185.5g About 185.5g
尺寸 Size	164.15*75.35*8.4mm

性能参数 Performance parameter	
CPU	天玑720八核, 2.1GHz Dimensity 720 eight-core, 2.1GHz
RAM+ROM	8GB+128GB
TF卡 TF card	最大支持128GB Maximum support 128GB
操作系统 Operating system	Android 10


屏幕参数 Screen parameters	
屏幕尺寸 Screen size	6.58英寸水滴FHD+ 6.58 inch water drop FHD+
分辨率 Resolution	2408 * 1080
触摸屏 Touch screen	电容式触摸屏 Capacitive touch screen

摄像头 Camera	
后置四摄 Rear four cameras	4800万+200万 48 million + 2 million
前置 Front-Facing	800万像素 8 million pixels
闪光灯 Flash	支持可当手电筒功能 Support can be used as a flashlight function

充电方式 Charging method	
USB	Type-C
电池容量 battery capacity	5000mAh

数据网络 Data network	
WWAN	2G:GSM 850/GMS900/DCS1800/PCS1900 2G:CDMA BC0 3G:WCDMA B1/B4/B5/B8 3G:CDMA2000 BC0 4G:TDD-LTE B34/B38/B39/B40/B41 4G:FDD-LTE B1/B3/B4/B5/B8/B28A 4G+:B1/B3/B39/B40/B41 5G:n1/n28A/n41(2525-2675MHz)/ n77(3300-3600MHz)/ n78(3300-3600MHz)
蓝牙 Bluetooth	蓝牙 Bluetooth
WiFi	支持 Support
NFC	发射频率: 13.56MHz Transmit frequency: 13.56MHz
OTG	支持 Support
GPS	GLONASS / Galileo

传感器 Sensor	
指纹识别 Fingerprint recognition	支持 Support
光线感应 Light sensor	支持 Support
近距离传感器 Proximity sensor	支持 Support
陀螺仪 Gyro	支持 Support
电子罗盘 Electronic compass	支持 Support
气压计 Gas pressure gauge	支持 Support
加速度计 Accelerometer	支持 Support



注：以上参数仅供参考，我公司可能会针对市场变化进行产品优化，谨请理解。

Note: The above parameters are for reference only. Our company may optimize products according to market changes. Please kindly understand.



安卓
Android GO(Oreo)



全网通4G



四核
Quad core



1+8GB



2.4QVGA



蓝牙
Bluetooth



WiFi



摄像头
Camera



定位
GPS

 **防爆|防水|防震|防尘**

Explosion-proof|Waterproof|Shockproof|Dustproof

(可定制-行业定制/私人定制服务)

(Customizable-industry customization/private customization service)

EX7087

防爆手持终端

Explosion-proof handheld terminal



产品规格 Product Specifications >>

功能配置 Function configuration	客户配置确认 Customer configuration confirmation	
平台 Platform	MT6762 系统:Android 8.1 MT6762 system: Android 8.1	
Flash大小 Flash size	4+64	D4X
频段(全球通频段) Frequency Band (Global Pass Band)	2G	GSM:850/900/1800/1900 WCDMA:850/900/1700/1900/2100 TD-SCDMA:B34/B39 EVDO:800
	3G	TDD-LTE:B34/B38/B39/B40/B41 FDD-LTE:B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28AB
	4G	海恒通009 Haihengtong 009
DMR	选配 Matching	
FM/BT/WiFi/GPS	支持 Support	
WiFi	802.11 a/b/g/n/ac	2.4G/5.0G
BT	5.0	
GPS	四选四 Choose four from four	
音频功放 Audio amplifier	外置K类 External type K	喇叭(2040 8欧2W、MAX3W) Horn (2040 8 ohm 2W, MAX3W)
主MIC Main MIC	小板MIC Small board MIC	小板上 Small board
听筒 Earpiece	支持1206防水听筒,焊线结构 Support 1206 waterproof earpiece, welding wire structure	(主板提供焊盘位)(The motherboard provides pad positions)
马达 Motor	支持 Support	(主板提供焊盘位)(The motherboard provides pad positions)
OVP过压保护 OVP overvoltage protection	支持 Support	
EOS浪涌/标准 EOS surge/standard	支持 Support	
OTG	支持 Support	
充电IC Charging IC	5V 2A	
座充 Cradle	支持, 还未开模 Support, but not open the mold	
扩展接口 Extension ports	预留BTB连接器(外接USB)6PIN Reserved BTB connector(external USB)6PIN	
G-sensor	支持 Support	
光感/跟随感应 Light sensing/Following away sensing	支持 Support	
陀螺仪 Gyro	支持 Support	
地磁传感器 Geomagnetic sensor	支持 Support	
NFC	支持 Support	
电池 Battery	可拆卸电池3200mah Removable battery 3200mah	
指纹识别 Fingerprint recognition	支持 Support	
指示灯/颜色 Indicator light/color	支持(状态灯三色) Support(three-color status light)	
SIM1	支持(NANO卡) Support (NANO card)	
SIM2	支持(NANO卡) Support (NANO card)	
T卡	支持 Support	
天线弹片/RF射频测试座 Antenna shrapnel/RF radio frequency test stand	支持 Support	

电池连接器 Battery connector		
USB接口 USB interface	Type-C	
耳机座 Headphone holder	CTIA(共L500) CTIA (total L500)	支持对讲耳机 Support intercom headset
TP连接器 TP Connector	支持(G+FF) Support (G+FF)	
屏幕尺寸 Screen size	5.0寸HD/FHD	16:09
背光 Back light	3串1并(屏规格书为准) 3series and 1 parallel(screen specification shall prevail)	
前CAMERA Former camera	500(FF)	
后CAMERA	1600(AF)	
副后摄 Sub-back shot	不支持 Not supported	
验钞灯 Money detector lamp	不支持 Not supported	
后闪光灯 Rear flash	真闪(4*4)同L500 Real flash (4*4) same as L500	
侧键 Side button	实体(按键功能图)为准 The entity(key function diagram)shall prevail	
尺寸 Size	164.5*78.6*18.2	



Ex 防爆|防水|防震|防尘

Explosion-proof|Waterproof|Shockproof|Dustproof

(可定制-行业定制/私人定制服务)

(Customizable-industry customization/private customization service)

W560 防爆手持终端

Explosion-proof handheld terminal



安卓10
Android10



移动/联通
China Mobile/
Unicom



八核
Eight core



6/8+128GB



6.3英寸
6.3 inches



蓝牙
Bluetooth



WiFi



摄像头
Camera



NFC



指纹
Fingerprint



定位
GPS



IP68防护
IP68 Protection



产品规格 Product Specifications >>

物理参数 Physical parameter		
外观 Exterior	直板 W560防爆手持终端 IP68级防水 Straight W560 explosion-proof handheld terminal IP68 waterproof	
颜色 Color	多选 Multiple Choices	
尺寸 Size	165*76*16mm	
处理器 Processor	4G 全网通, MTK6762, 8 核2.0G+1.5G 4G full Netcom, MTK6762, 8-core 2.0G+1.5G	
存储 Storage	标配Standard ROM+RAM, 2GB+16GB, 3GB+32GB, 4GB+64GB	最大支持4+64 Maximum support 4+64
显示屏 Display screen	5.0 英寸(IPS 屏1280*720 分辨率) 5.0 inches (IPS screen 1280*720 resolution)	最大支持720*1600 Maximum support 720*1600
网络制式 Network standard	双卡4G 双待多模方式Dual SIM 4G Dual Standby Multimode : 1. GSM:B5/850;B8/900;B3/1800;B2/1900; CDMA 1X 2. 3G:WCDMA B1/2100;B2/1900;B5/850;B8/900; 3G:CDMA2000/EVDO 3G:TD/SCDMA 3. FDD-LTE, FDD LTE B1/B2/B3/B4/B5/B7/B8/B12/B13/B17/ B20/B28 4. TDD: B38/B39/B40/B41	
蓝牙 Bluetooth	BT4.0	
WiFi	支持2.4/5GHz A/B/G/N/AC 支持WiFi 漫游 Support 2.4/5GHz A/B/G/N/AC Support WiFi roaming	
收音机 Radio	支持, 耳机带天线 Support, headset with antenna	
GPS	GPS, 北斗, GLONASS GPS, Beidou, GLONASS	
扫描 Scanning	支持软解及硬解1/2D扫描(斑马4710, 霍尼韦尔3601) Support soft solution and hard solution 1/2D scan (Zebra 4710, Honeywell 3601)	
USB接口 USB Interface	TYPE-C, 支持快充>5V/2A, USB2.0 TYPE-C, support fast charge>5V/2A, USB2.0	
摄像头 Webcam	后1300万像素摄像头 Rear 13 million pixel camera	
卡槽 Card slot	Micro 双卡双待; 支持T卡扩展最大支持32GB Micro dual card dual standby; support T Card expansion, maximum support 32GB	
操作系统 Operating system	Android9.0原生系统, 可注册GOOGLE 帐号 Android9.0 native system, GOOGLE account can be registered	
UI界面 UI interface	按客户要求 According to customer requirements	
音频系统 Audio system	支持 Support	
3D加速度计 3D accelerometer	支持 Support	
3D陀螺仪 3D gyroscope	支持 Support	
电子指南针 3D gyroscope	支持 Support	
距离传感器 Distance sensor	支持 Support	
光感传感器 Light sensor	支持 Support	
气压计 Pressure gauge	支持 Support	
NFC	NXP PN553	兼容 Compatible
视频编码格式 Video encoding format	1080P 30fps H.264/H.265	
振动马达 Vibration motor	支持 Support	
耳机 Earphone	3.5mm	
麦克 Mike	支持 Support	
指示灯 Indicator light	支持三色, 红、绿、蓝 Support three colors, red, green, blue	
按键 Button	正面4个快捷功能按键, 侧面5个: "音量+ -" 左右双扫描键, 电源键 4 shortcut function buttons on the front, 5 buttons on the side: "Volume + -" left and right scan buttons, power button	
指纹识别 Fingerprint recognition	支持 Support	
电池 Battery	3.8V, 3300毫安电池 3.8V, 3300mAh battery	
座充 Dock charger	支持充电及OTG Support charging and OTG	
扩展接口 Extension ports	预留UART 串口 Reserved UART serial port	